


Trench Restoration detail for Lee County Maintained Roads

Existing Surface
Shall be Cut
Square by
Mechanical Sawing
(See General
Note 4)

Tack Vert. Face, Join and/or
Butt Joint to Satisfaction of
County Engineer

Type Asphaltic Concrete or Required

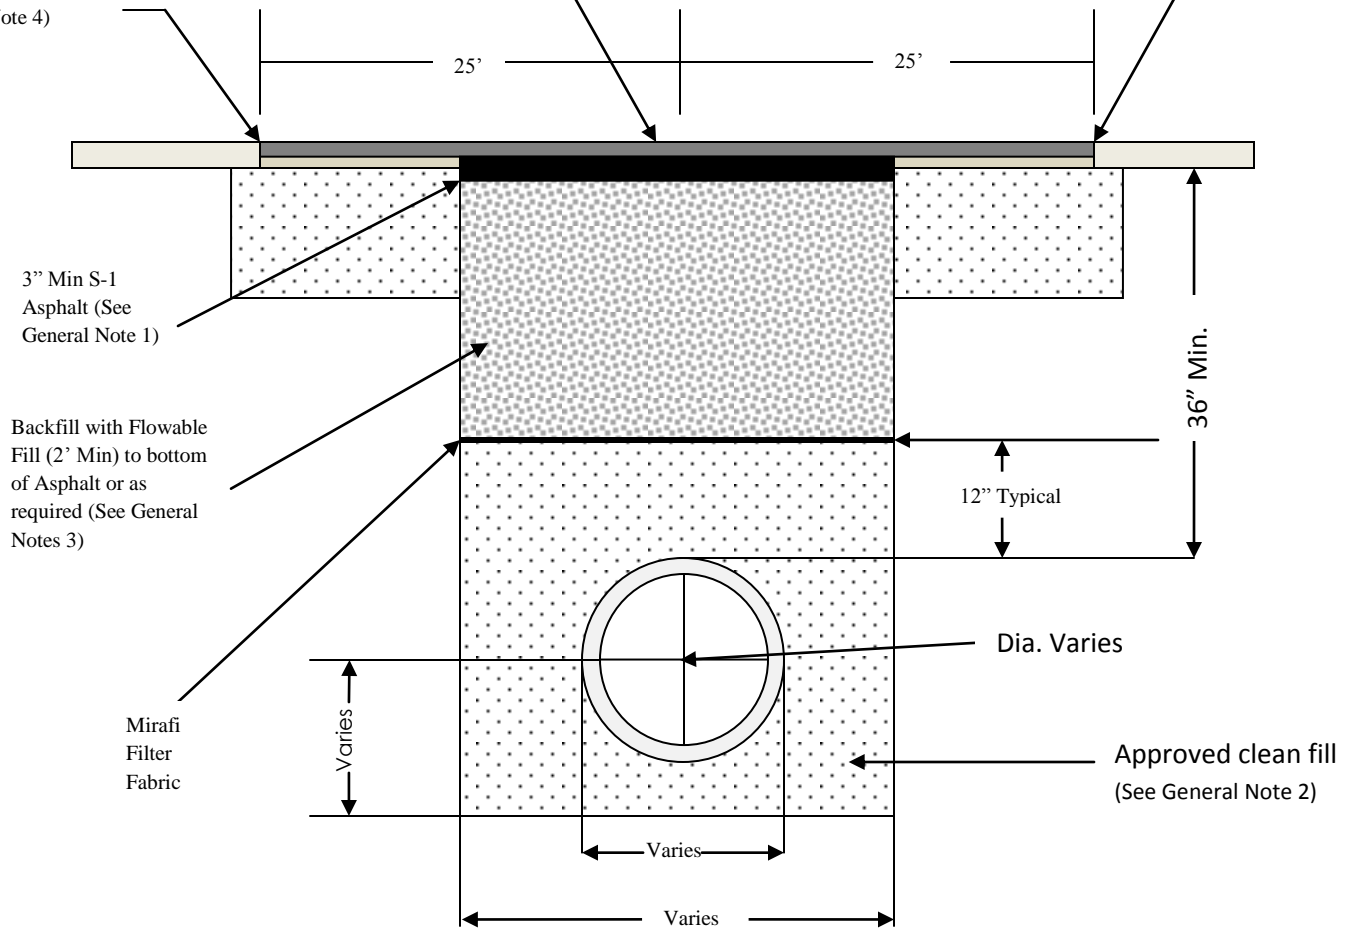

Overlay with 1" S-3 asphalt or match existing, 25 feet in each direction
with 2' wide X 3/4" deep milled butt joint at each end.

General Notes

1. The limits of Asphalt (overlay) replacement shall be determined by Lee County
2. For gravity pipe lines, may use rock 1' (ft) above pipe.
3. Controlled Low Strength Materials (CLSM)
4. Using a 3/4" Thick X 4' Wide Butt Joint at Each End
5. Compaction must be performed in 6" lifts with densities every 12"