

ROADWAY LANDSCAPE ADVISORY COMMITTEE

Appointed by Lee County Board of County Commissioners

LEE COUNTY ROADWAY LANDSCAPE
ADVISORY COMMITTEE MEETING OF
February 4, 2014
FIRST FLOOR CONFERENCE ROOM
COMMUNITY DEVELOPMENT/PUBLIC WORKS CENTER
1500 MONROE STREET, FORT MYERS, FLORIDA
6:00 – 7:30 P.M.
AGENDA PACKAGE ACCESS

<http://www.leegov.com/gov/dept/dot/rlac/Pages/default.aspx>

1. Call to Order 6:00 P.M. (Debbie Hughes)
2. *Approval of the March 5, 2013 and October 1, 2013 Regular Meeting Minutes (no quorum on 10/1) (Debbie Hughes, 5 min.)
3. New Business:
 - a. Discussion of clear zones and clear sight for safety concerns and risk management in future designs (Bob/DOT Traffic/Landscape Architects, 20 min.)
 - i. Main effects on landscape designs
 - a. Adhere to Florida Green Book
 - i. Table 3-12
 - ii. FDOT Design Standard Index 700
 - iii. FDOT Design Standard Index 546
 - iv. FDOT Design Standard Index 544
 - ii. Other effects
 1. LeeScape
 2. Prioritization List
 - b. Shoppes at Plantation presentation (Rebecca Scheffler Morris, RLA, RSM Design, Inc. 15 min.)
 - c. Reminder of election of officers. (Bob DeBrock, 1 min.)
 - d. Ortiz Ave. median in front of Nature Center. (Bob DeBrock, 5 min.)
 - i. Maintenance
 - ii. Future
 - e. Palm Beach Blvd. trees blocking Riverland Nursery (Bob DeBrock, 5 min.)
 4. Old Business:

- a. Project Status Update (Bob DeBrock, 5 min.)
- 5. Other Business: (limit 10 min. per topic)
- 6. Adjourn by 7:30 P.M.

NOTE: The Roadway Landscape Advisory Committee (RLAC) consists of members appointed by the Lee County Board of County Commissioners to advise on matters related to roadway landscaping activities in Lee County. The committee meets regularly each month and meetings are open to the public. For more information, please contact Bob DeBrock at (239) 533-9425.

C/O Lee County Department of Transportation, 5560 Zip Drive, Ft. Myers, FL 33905 (239) 533-9400

ROADWAY LANDSCAPE ADVISORY COMMITTEE (RLAC)

DATE: March 5, 2013

TIME: 6:00 P.M.

PLACE: 2115 Second Street, Fort Myers, Florida

MEMBERS PRESENT:

John Sibley, District 2
David Salko, Horizon Council
Jennifer Evans, Florida Native Plant Society
Stephen Brown, Horticultural Extension Agent
Debbie Hughes, Fort Myers/Lee County
Garden Council
Winston Church, Keep Lee County Beautiful
Michael Weston, Urban Forester

STAFF PRESENT:

Ehab Guirguis, LCDOT
Doraine Wetzal, LCDOT
Robert DeBrock, LCDOT

MEMBERS EXCUSED ABSENT:

Barbara Niland, District 5

MEMBERS ABSENT:

Al O'Donnell, District 3
Gail Archer-Dearie, District 1
Esta Rubinstein, District 4

OTHERS PRESENT:

JB Schuetz, City of Ft. Myers
Jonathan Romine, Ensie
Isaac Wilder, HOA Siesta Isles
Ann Wilder, HOA Siesta Isles
Esther Schultz, HOA Siesta Isles
Michael Sklorenko, HOA Siesta Isles
Cancy Keim, HOA Siesta Isles

Quorum Confirmed with 7 members present.

Debbie Hughes called the regular monthly meeting of the Roadway Landscape Advisory Committee (RLAC) to order at 6:00 pm.

Approval of the December 4, 2012 Regular Meeting Minutes:

Debbie Hughes asked for a motion to approve the December 4, 2012 RLAC meeting minutes, a motion was made by John Sibley to approve the minutes, seconded by Jennifer Evans; the motion was called and carried.

NEW BUSINESS

Organizational Changes

Ehab Guirguis, Engineer Manager II has been with Lee County for 12 years. Ehab oversees the operations of Lee County Landscape, Drainage and Bridges. He explained that Lee County DOT is going through some organizational changes and announced that Robert DeBrock will take over the position as liaison for the RLAC. Bob comes highly recommended. He has been with the County for 10 ½ years. During that time he has been involved in over 30 CIP projects entailing

about 20 million dollars, which he served as Project Manager. His credentials include being a Certified Arborist Municipal Specialist, FNGLA Certified Horticulture Professional, Certified Stormwater Inspector, and Certified Pesticide Applicator as well as being certified in Hazardous Materials Operations and Intermediate Maintenance of Traffic. Bob is a member of the ISA (International Society of Arboriculture), SMA (Society of Municipal Arborist), FNGLA (Florida Nursery, Growers and Landscape Association) and he attended the Municipal Forestry Institute sponsored by the SMA. Bob has been diversified through his tenure at Lee County DOT Operations and is a valuable asset. He is ready to take on this new challenge as liaison to the RLAC for Lee County.

Siesta Isles HOA grant request.

Bob DeBrock introduced Jonathan Romine from Ensite and explained that grant programs fall under the specifications as outlined in the LeeScape Master Plan. Bob explained that the funds if approved by the Board of County Commissioners need to be allocated by September 30, 2013. Jonathan presented the design plan for the Siesta Isles HOA Grant. The project is located along Siesta Dr. near Ft. Myers Beach and the design for the grant encompasses the medians only. There was a \$6,000.00 matching grant in 1998; a limited amount of plants still exist. The proposed plan will relocate some of the larger palms. The HOA will be responsible for the replacement of signs and the plantings in the roundabouts. The Siesta HOA was established in 1981, since that time they have taken care of the maintenance including some tree replacements. The proposed plan includes several dedicated crosswalks using pavers; low volume drip irrigation, and the plant pallet chosen for this design includes some canopy trees to provide shade through the corridor.

The total estimated cost of the project is \$61,000 and the grant request for Lee County is \$44,000.00. Winston Church asked if the HOA was contributing any additional funds toward the \$44,000.00, Jonathan stated that the HOA is asking for 100% of the requested funds for the Grant. David Salko voiced his concern on the use of Crape Myrtles, Flax Lilies and the annuals, he stated the annuals will pose a maintenance issue because they will only last a few months and will have to continually be replaced, he suggested choosing some type of perennial like Lantana's which would provide color. The Crape's and Flax tend to stress in this particular environment, he suggests Ficus and Emerald Blanket Carissa. Jenny Evans would like to see more Natives in the design since they are drought tolerant. Debbie asked Jonathan who would be maintaining the medians; Jonathan stated that the HOA will be using their existing landscape contractor to continue to maintain the medians. Stephen Brown added that his experience with Flax has done well in this environment. Debbie recommends they use Golden Creeper instead of the Ficus. John Sibley would like to see more natives incorporated in this design. He also noted the Lantana Camara is a category 1 invasive exotic and objects the use of this type of plant. Jenny noted that the Fakahatchee grass dries out in the winter and suggest he use muhly grass. Stephen recommended using Gumbo Limbo instead of the Live Oaks. JB noted the Geiger would be an alternative to the Crape Myrtle, Michael Sklorenko added that the reason to keep the height of the trees is to accommodate the view of the dock area for those residence living in the condo's. Jenny suggested Jamaican Dogwood, Stephen agreed with the Jamaican Dogwood suggestion; Jonathan has concerns of finding the size they need at an affordable price. John Sibly also made a suggestion to use Horizontal Coco Plum; Jonathan stated that County Staff had

already requested to switch to the Horizontal Coco Plum. Debbie also suggested for color, Yesterday, Today, Tomorrow, Stephen added that they are cold sensitive and loses their leaves in the winter; Jonathan said they are hard to locate and that Collier County tried using them and had no success.

Jonathan summarized the recommendations from the RLAC members: the Royals need to be Florida Royals, and a suggestion was made to use Buttonwood instead of Crape Myrtle some were in favor to keep the Crape Myrtles. Live Oaks will be replaced by Jamaican Dogwood, Coco Plum will be horizontal, will use Muhly Grass in place of Fakahatchee, change from Hibiscus to Jamaican Caper, Green Island Ficus is Jonathan's preference over the Carissa but it will be determined by County Staff. The Lantana will be replaced by Golden Creeper. The HOA will be responsible for the annuals.

David Salko made a motion to approve the design for Siesta Isles HOA Grant with the modifications discussed to add more natives and to send a revised plant list to the RLAC members for confirmation, seconded by Winston Church; the motion was called and carried.

OLD BUSINESS:

Project Status Update by Bob DeBrock

- Plantation Extension from Idlewild to Colonial - In contract maintenance. Final completion.
- US 41 from Littleton to Charlotte County line - In contract maintenance. Final completion.
- Three Oaks from Corkscrew to Alico - In Contract Maintenance.
- Estero Pkwy Ext from Three Oaks to Ben Hill Griffin - In contract maintenance.
- Three Oaks Pkwy from Bonita Bill to E. Terry – Received approval from the Board, working on contracts.
- Colonial from Six Mile Slough to SR 82 – Received approval from the Board, working on contracts.
- Gladiolus/Bass Rd. from Winkler to San Carlos – Soil is compacted in the median, working on a soil amendment plan.
- Bonita Beach Rd. – also having compacted soil problems.
- Summerlin from Boy Scout to Cypress Lake – Preparing for Bid.
- Six Mile Cypress from Daniels to Colonial – working on plans.
- Bonita Beach Rd. from Old 41 to Lime – working on plans.

OTHER BUSINESS:

Debbie inquired about the volunteer tree planting project with Russ Ringland. There are several areas that are looking quite bad. Bob said the County has been out with the water truck but the watering is Russ' responsibility. Bob added that they are being more rigid with the permitting process to regulate the plantings. Ehab stated that Staff is enforcing the use of Florida No 1

plants, the last set of plants were inspected by Bob and Mike Williams before they were purchased. Debbie mentioned that Russ has done a good job and has been planting as many trees as possible. She recommends he buy less and plant less since this is a main corridor and should continue to look nice. John Sibley asked if specified sizes are being recommended. Bob and Ehab said they require 3 gallon.

Mike Weston asked if there is anything specified on volunteer projects that falls under standard operating procedures for a maintenance plan. Bob and Ehab stated the Veterans Pkwy volunteers have been told to plant better quality plants, stay off the berms, educate the volunteers on proper planting and limit plants to 500. Debbie would like to see different species used.

Meeting Adjourn at 7:05 pm
Respectfully submitted,

Doraine Wetzel
Administrative Assistant

Chairman

Date

Secretary

Date

Attachment: Attendance Record

ROADWAY LANDSCAPE ADVISORY COMMITTEE (RLAC)

DATE: October 1, 2013

TIME: 6:00 P.M.

PLACE: 2115 Second Street, Fort Myers, Florida

MEMBERS PRESENT:

Jennifer Evans, Florida Native Plant Society
Winston Church, Keep Lee County Beautiful
Ronnie Simpson, Arborist-International Society of
Arboriculture

STAFF PRESENT:

Doraine Wetzel, LCDOT
Robert DeBrock, LCDOT

OTHERS PRESENT:

JB Schuetz, City of Ft. Myers
Beth Workman, LC Community Development

MEMBERS EXCUSED ABSENT:

Debbie Hughes, Fort Myers/Lee County
Garden Council

MEMBERS ABSENT:

Gail Archer-Dearie, District 1
John Sibley, District 2
Al O'Donnell, District 3
Esta Rubinstein, District 4
Barbara Niland, District 5
Stephen Brown, Horticultural Extension Agent
Michael Weston, Urban Forester

Quorum not met with only 3 members present.

Robert DeBrock called the regular monthly meeting of the Roadway Landscape Advisory Committee (RLAC) to order at 6:10 pm.

Approval of the March 5, 2013 Regular Meeting Minutes:

Approval of the March 5, 2013 RLAC meeting minutes, is postponed until the next meeting when a quorum is confirmed.

NEW BUSINESS

Introduce Mr. Ronnie Simpson, representing At-Large-Arborist-International Society of Arboriculture.

Bob DeBrock introduced the new Roadway Landscape Advisory Committee member, Mr. Ronnie Simpson and gave a brief biography. Originally from North Carolina, Certified Arborist Ronnie Simpson has worked his way south from Charlotte, NC to Cape Coral, FL caring for trees the whole way. He has worked in the tree care industry for over 20 years; Ronnie is a member of the International Society of Arboriculture and the ISA Florida Chapter. He specializes in Plant Health Care, and with this, advocates passionately for the care and health of trees, versus removal or destruction. Ronnie is currently seeking his certification as a Board Certified Master Arborist. He has lived in Cape Coral for over three years with his wife and daughter.

Resignation of David Salko.

Lee County Division of Public Resources sent David Salko a letter stating his term of appointment to serve as a member of the RLAC expired August, 2013 and asked if he would accept reappointment. David replied stating he does not wish to accept reappointment to this committee. His position has been vacated.

Acknowledge Debbie Hughes accomplishments noted in the Newspress.

On September 8, 2013 the News-press ran an article titled, "Passionists: Debbie Hughes' handiwork touches Southwest Florida". In the article they commended Debbie for her work at the Edison Home's Garden Shoppe, Terry Park and the Garden Council. To summarize the article; Debbie has a masters touch when it comes to plants and is very passionate at what she does. The Roadway Landscape Advisory Committee is fortunate to have someone of this high caliber.

Upcoming RLAC Election of Officers

On March 6, 2012 new officers were elected for a 2 year term, Bob stated that the committee will elect a new Chair and Vice Chair during our next meeting. Those in office currently cannot serve the same office, however they can be nominated for another position. Bob asked the committee to e-mail him their nominations and he will bring them to the next meeting to be voted on. Bob stated that at this time most communication between staff and the committee members will be done via e-mail.

OLD BUSINESS:

Project Status Update by Bob DeBrock

- In CIP contract maintenance
 - Three Oaks from Corkscrew to Alico. Final Completion 6/2014.
 - Gladiolus/Bass from Winkler to San Carlos/Health Park to Gladiolus. Final Completion 5/2018. This includes a 5 year maintenance on this project. Beth Workman announced this area has future developments planned.
- In Construction.
 - Colonial from S.R. 82 to the Six Mile Slough. Substantial Completion punch list items.
 - Three Oaks Pkwy. /Imperial from Bonita Bill St. to East Terry St. Finishing irrigation and planting trees.
- In Pre-construction.
 - Ben C. Pratt/Six Mile Cypress from Daniels to Colonial. Contract preparation. Awarded to Hannula Landscaping.

- o Summerlin Rd. from Cypress Lake Dr. to Boy Scout Dr. To the BoCC 10/24/13 to award to Valley Crest Landscape Development.

OTHER BUSINESS:

Winston Church inquired about the status of the Siesta Isles grant. Bob stated that the paperwork has been completed and sent for Board approval.

Winston also asked if the soil problems on Bonita Beach Rd. have been resolved. Bob stated there have been some design issues that they are working through. He mentioned the road work is complete and this project is assigned to Sarah Clark.

Beth brought up the Veterans planting project. Bob said County Staff is inspecting some plantings done on Veterans by Russ Ringland. Ronnie asked if the county requires a developmental pruning on these new trees. Bob stated that at the present we are doing this in house.

Meeting Adjourn at 6:30 pm
Respectfully submitted,

Doraine Wetzel
Administrative Assistant

Chairman

Date

Secretary

Date

Attachment: Attendance Record

Lee County Roadway Landscape Advisory Committee
12 Month Meeting Attendance Record
A = Absent, EA = Excused Absence, V = Vacant

	2013	2013	2013	2013	2013	2013	2013	2013	2013	2013	2013	2013	2014	
Voting Members	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.	Jan.	Total	
Al O'Donnell District 3	NO MEETING	A	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	A	NO MEETING	NO MEETING	NO MEETING	2	
Barbara Niland District 5		EA							A				2	
Esta Rubinstein District 4		A							A				2	
Vacant American Society of Landscape Architects		V							V					
Vacant Horizon Council	NO MEETING	V	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	V	NO MEETING	NO MEETING	NO MEETING		
Vacant Florida Nursery, Growers & Landscape Association		V							V					
Debbie Hughes Ft. Myers/Lee County Garden Council									EA				1	
Gail Annette Archer-Dearie District 1		A							A				2	
John Sibley District 2	NO MEETING		NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	A	NO MEETING	NO MEETING	NO MEETING	1	
Michael Weston Urban Forester									A				1	
Jenny Evans Florida Native Plant Society													0	
Ronnie Simpson International Society of Arboriculture, Certified Arborist													0	
Stephen Brown Horticultural Extension Agent	NO MEETING		NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	A	NO MEETING	NO MEETING	NO MEETING	1	
Winston Church Keep Lee County Beautiful													0	
Non-voting Members (Staff)														
Beth Workman Community Development		A											1	
Bob DeBrock Department of Transportation Parks & Recreation	NO MEETING		NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING	NO MEETING		NO MEETING	NO MEETING	NO MEETING	0	

TABLE 3 – 12
MINIMUM WIDTH OF CLEAR ZONE

Type of Facility	DESIGN SPEED (MPH)							
	25 and Below	30	35	40	45	50	55	60 and Above
	MINIMUM CLEAR ZONE (FEET)							
Rural •	6	6 Local	6 Local	10 Collectors	14 Arterials and Collectors ADT < 1500	14 Arterials and Collectors ADT < 1500	18 Arterials and Collectors ADT < 1500	18 Arterials and Collectors ADT < 1500
		10 Collectors 14 Arterials	10 Collectors 14 Arterials	14 Arterials	18 Arterials and Collectors ADT ≥ 1500	18 Arterials and Collectors ADT ≥ 1500	24 Arterials and Collectors ADT ≥ 1500	30 Arterials and Collectors ADT ≥ 1500
Urban *	1 ½	** 4	** 4	** 4	** 4	** N/A	** N/A	** N/A

*

From face of curb

**

On projects where the 4 foot minimum offset cannot be reasonably obtained and other alternatives are deemed impractical, the minimum may be reduced to 1 ½'.

•



Use rural for urban facilities when no curb and gutter is present. Measured from the edge of through travel lane on rural section.

**



Curb and gutter not to be used on facilities with design speed > 45mph.

NOTE: ADT in Table 3 - 12 refers to Design Year ADT.



C:\projects\standards\landscape\00500-s\00544-01.dgn 11:44:51 AM 12/30/2011

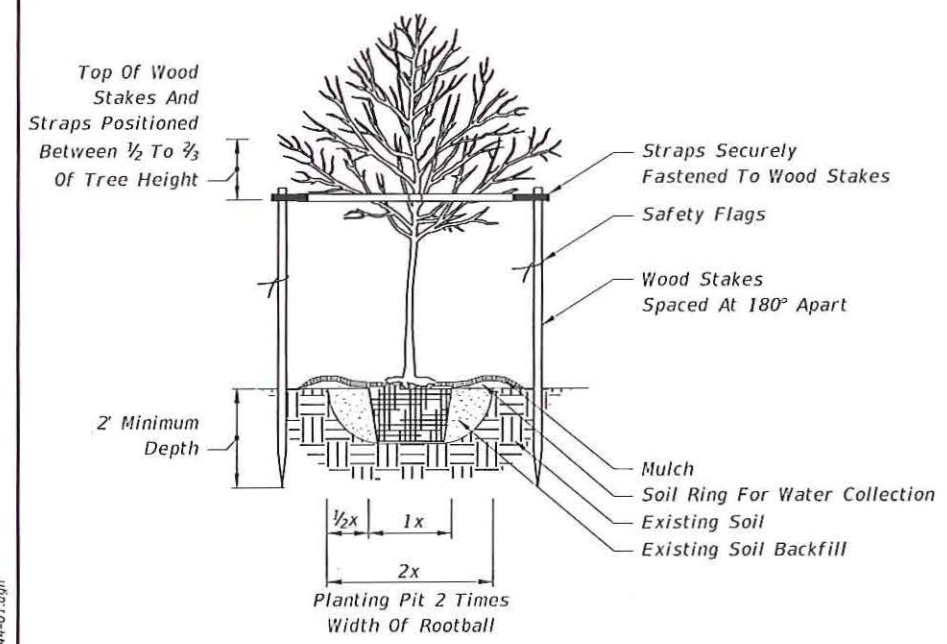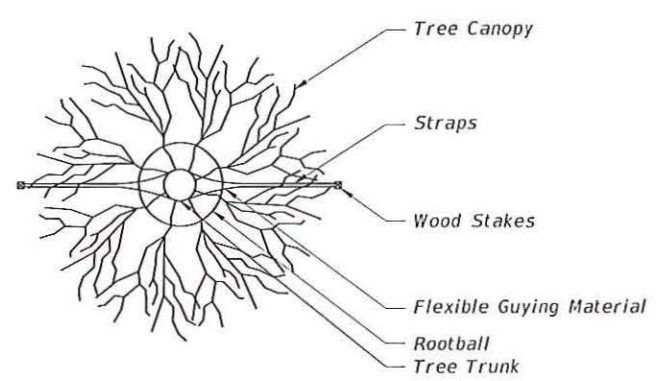

1" - 3 1/2 " CALIPER TREE PLANTING

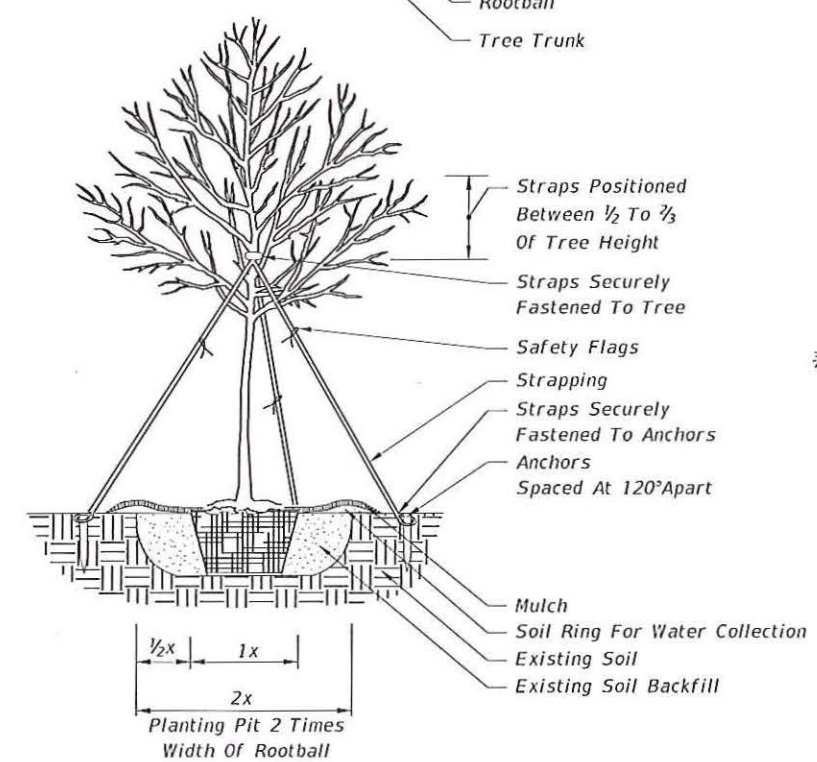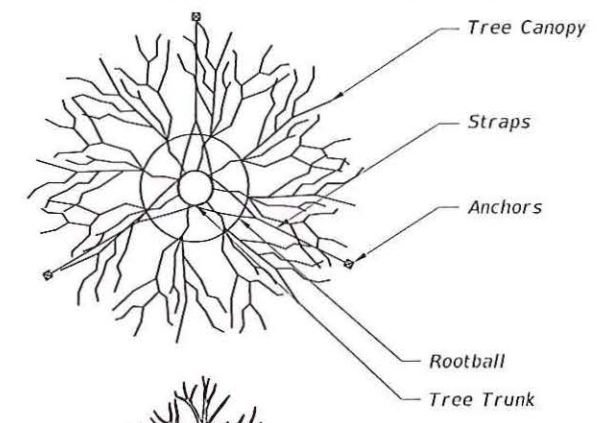

4" AND LARGER CALIPER TREE PLANTING

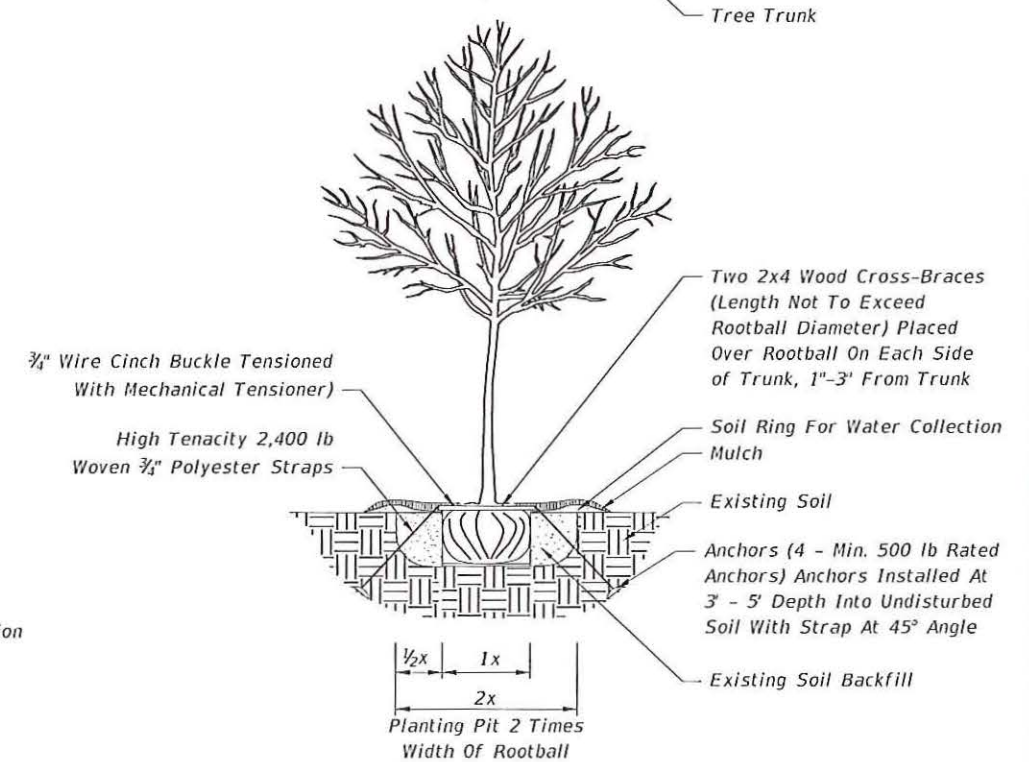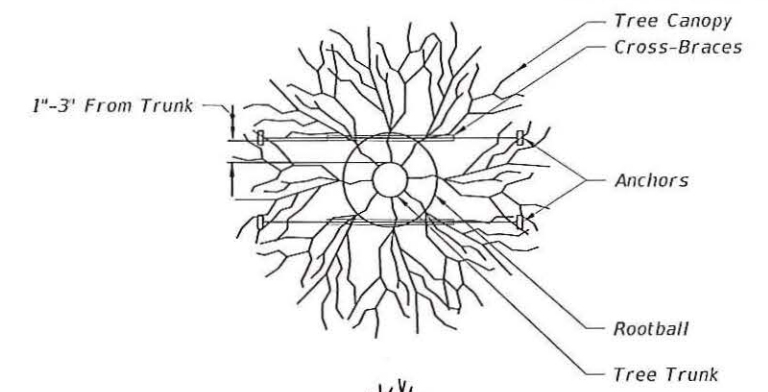


1" - 3 1/2" CALIPER TREE PLANTING WITH UNDERGROUND BRACING

GENERAL NOTES:


1. All dimensions 6" and less are exaggerated for illustrative purposes only.
2. Plant containers shall be removed prior to planting. If plants are not container grown, remove a minimum of the top 1/3 of burlap, fabric, or wire mesh. Never lift or handle the tree by the trunk.
3. The uppermost root on all trees shall be covered by less than 1" of soil. Use hand tools to carefully remove all excess soil. The top of root ball shall be set 1"-2" above finish grade and set plumb to the horizon. If planting pit is too deep, remove the tree and firmly pack additional soil in the bottom of the planting pit to raise the rootball. After positioning the tree in the planting pit, slice through rootballs with 3 or 4 vertical slices (top to bottom) equally distributed around the tree.
4. Backfill shall be loosened existing soil. Remove rocks, sticks, or other deleterious material greater than 1" in any direction prior to backfilling. Water and tamp to remove air pockets. If existing soils contain excessive sand, clay, or other material not conducive to proper plant growth, contact Engineer prior to planting.
5. Soil rings shall be constructed of existing soil at the outer edge of the planting pit, with a height of 3" and gently sloping sides. Do not pile soil on top of rootball.
6. Mulch shall be a 3" deep layer placed to the edge of the trunk flare, around the base of shrub, or solidly around groundcover. Never pile mulch against the tree trunk.
7. Straps shall be minimum 1" wide nylon or polypropylene. All wood stakes or anchors shall be located beyond the edge of soil ring and located below finished grade, unless otherwise specified.
8. Sabal Palms may be hurricane cut. All other palms must have fronds tied with biodegradable twine. Palm trunks shall have no burn marks, scars, or sanding.
9. All dimensions provided for wood materials are nominal.
10. When a permanent, subsurface, or drip irrigation system is provided, a soil ring is not required. Mulch to edge of planting pit.
11. Alternate tree bracing and guying systems approved by the Engineer may be used in lieu of the tree bracing and guying methods detailed on the Index. Alternate tree protection systems approved by the Engineer may be used in lieu of the tree protection barricade detailed on the index.
12. Remove aboveground guying systems at the end of the establishment period.

LAST REVISION		DESCRIPTION:		FDOT DESIGN STANDARDS FY 2012/2013	LANDSCAPE INSTALLATION	INDEX NO. 544	SHEET NO. 1
07/01/07	REVISION						

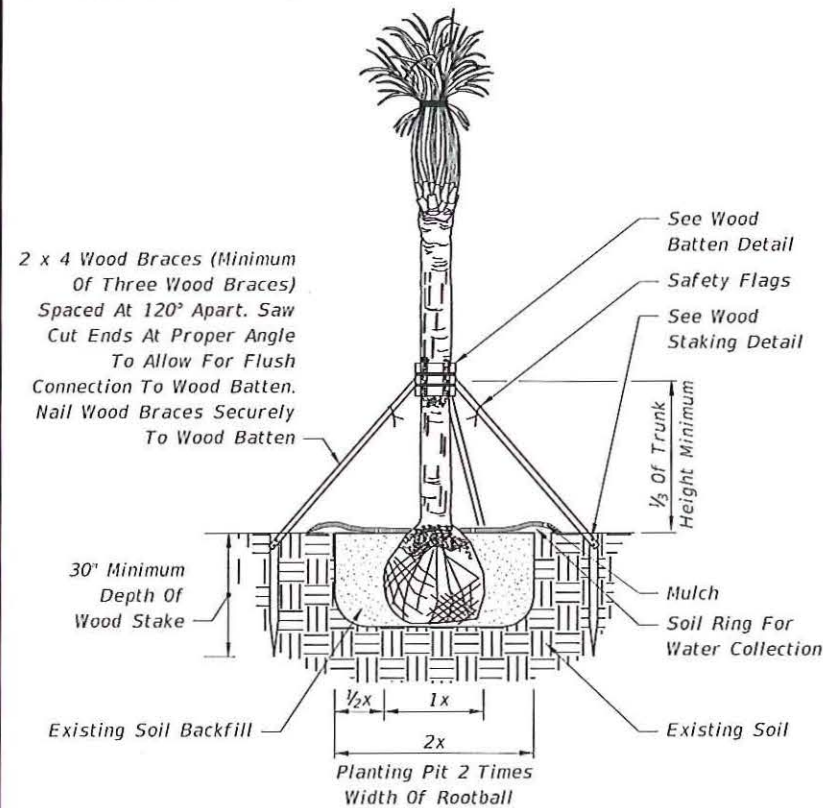


NOTE: For All Other Palms, Use Detail Provided By Landscape Architect In Contract Plans.

CABBAGE PALM PLANTING FOR UP TO 24' CLEAR TRUNK

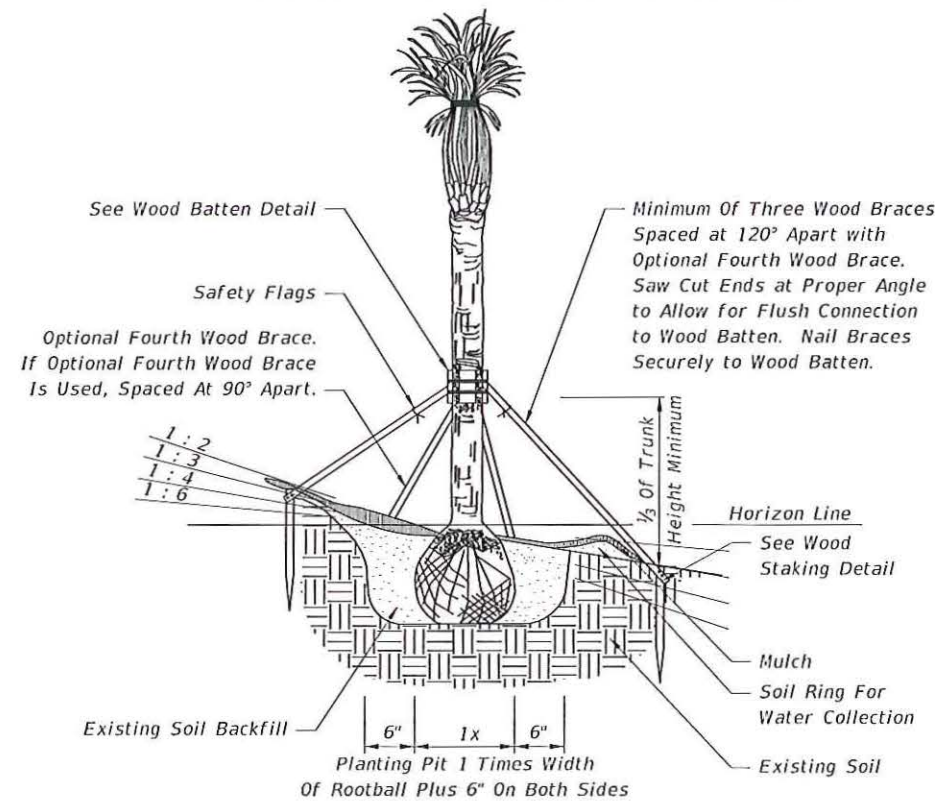


NOTES: Slope Provided As Rise:Run. For All Other Palms, Use Detail Provided By Landscape Architect In Contract Plans.


CABBAGE PALM PLANTING ON SLOPE FOR UP TO 24' CLEAR TRUNK

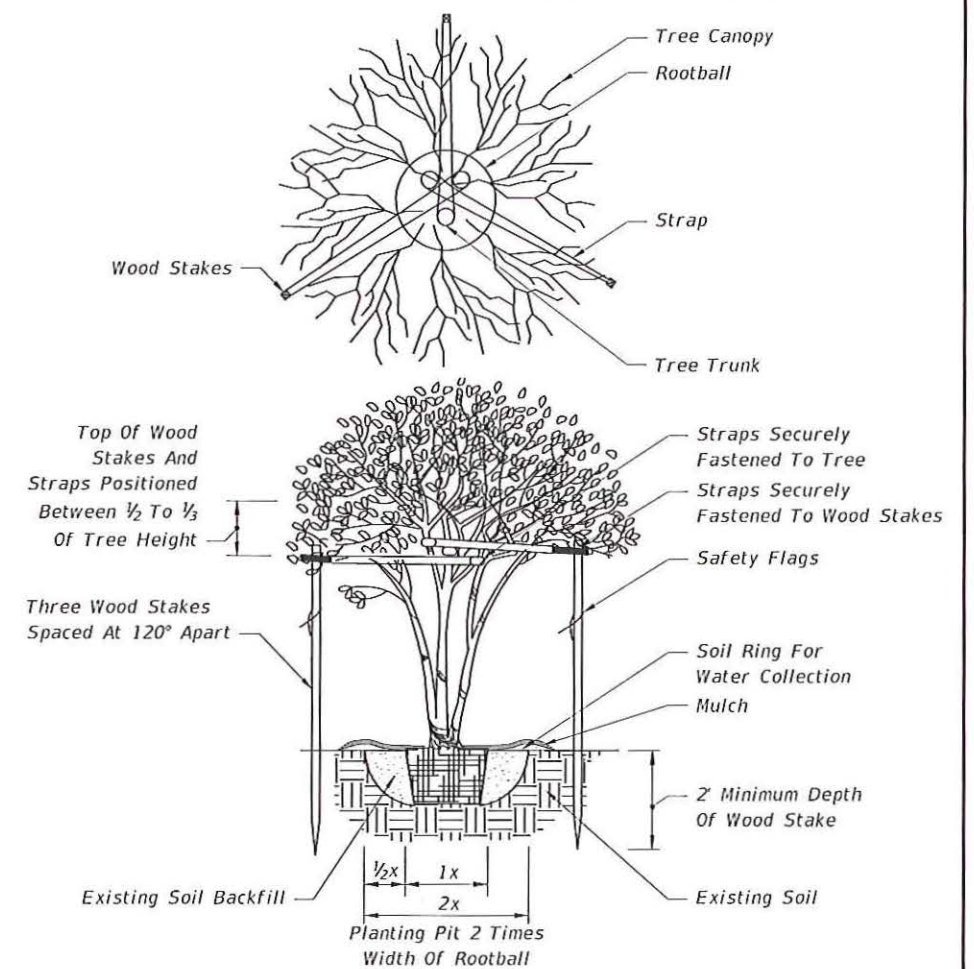

MULTI-TRUNK TREE PLANTING

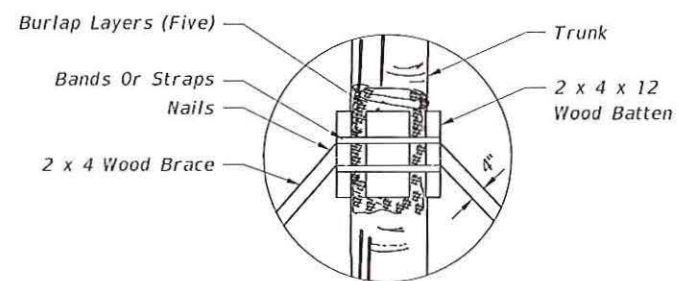


WOOD BATTEN DETAIL

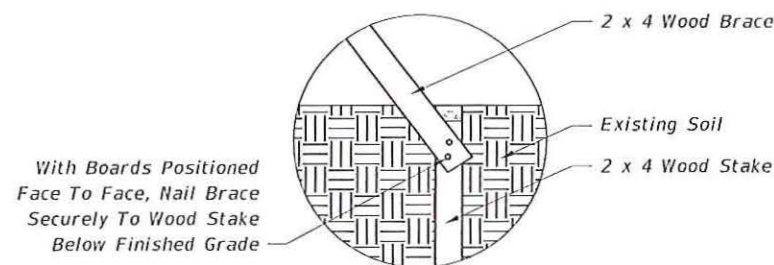


NOTE: Stake Into Firm, Existing Soil.

WOOD STAKING DETAIL

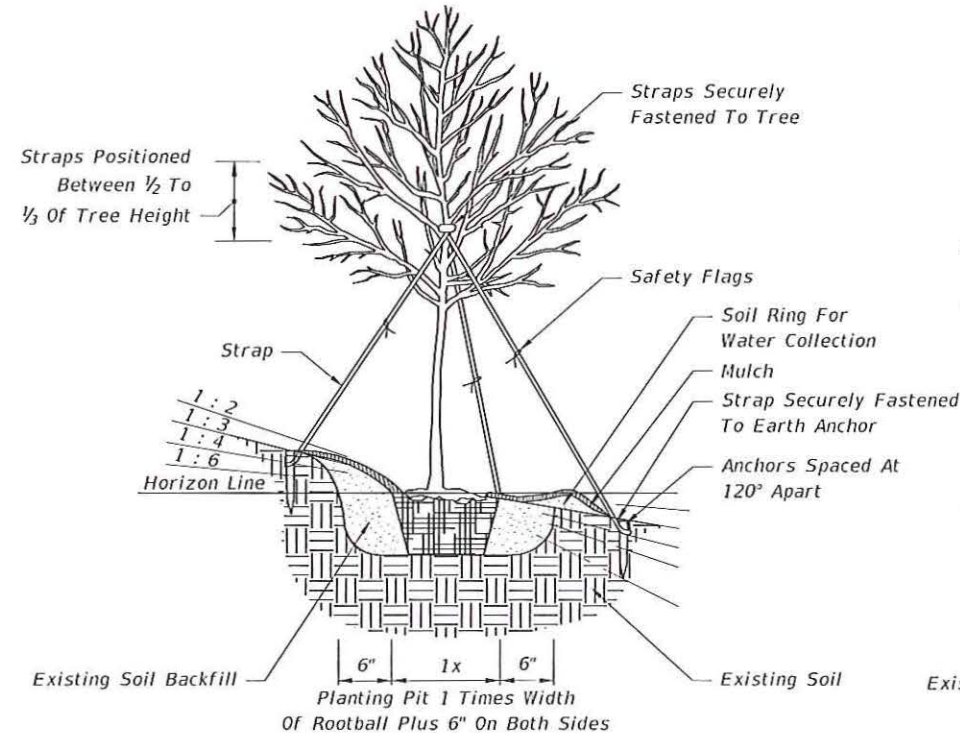

NOTE: Slope Provided As Rise:Run.

4\"/>

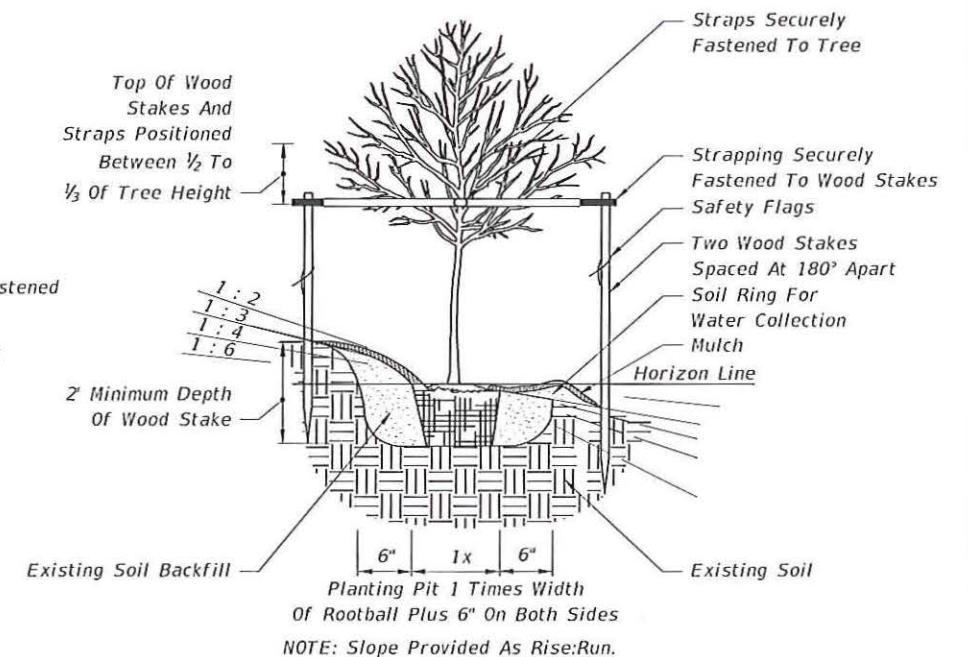


NOTE: Slope Provided As Rise:Run.


1\"/>

C:\N\projects\standards\landscape\00500-s\00514-02.dgn
11:44:52 AM
rd960rh
12/30/2011


LAST REVISION	DESCRIPTION:	FDOT DESIGN STANDARDS FY 2012/2013	LANDSCAPE INSTALLATION	INDEX NO. 544	SHEET NO. 2
07/01/07					

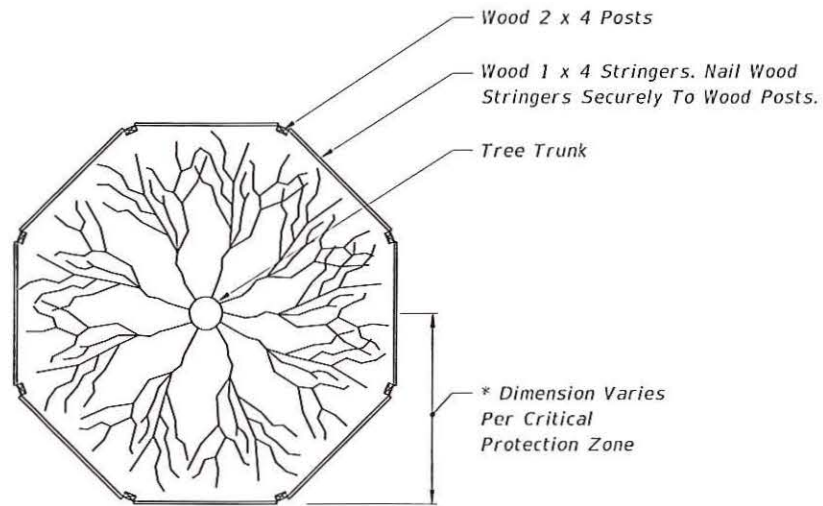

NOTE: For Groups Of Trees, Place Barricades Between Trees And Construction Activity.

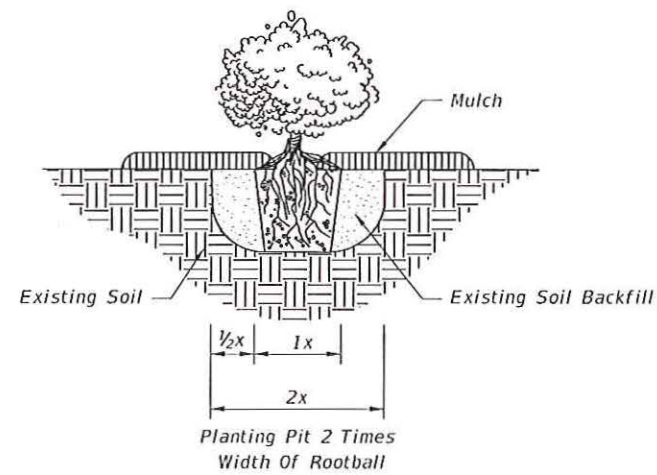


GROUND COVER/SHRUB PLANTING

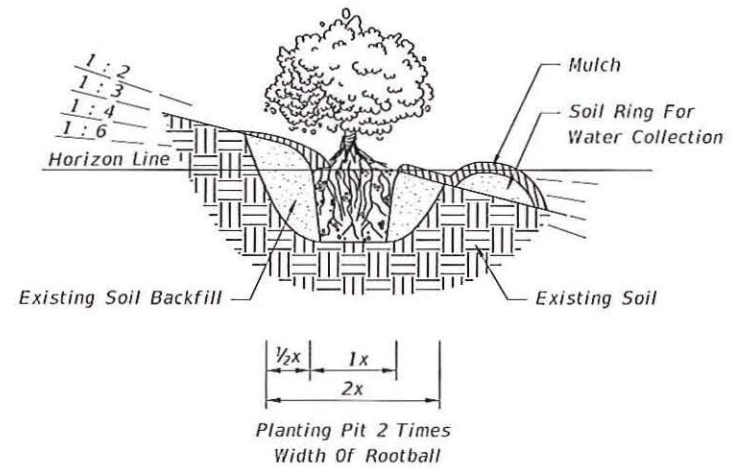

NOTE: Slope Provided As Rise:Run.


GROUND COVER/SHRUB PLANTING ON SLOPE

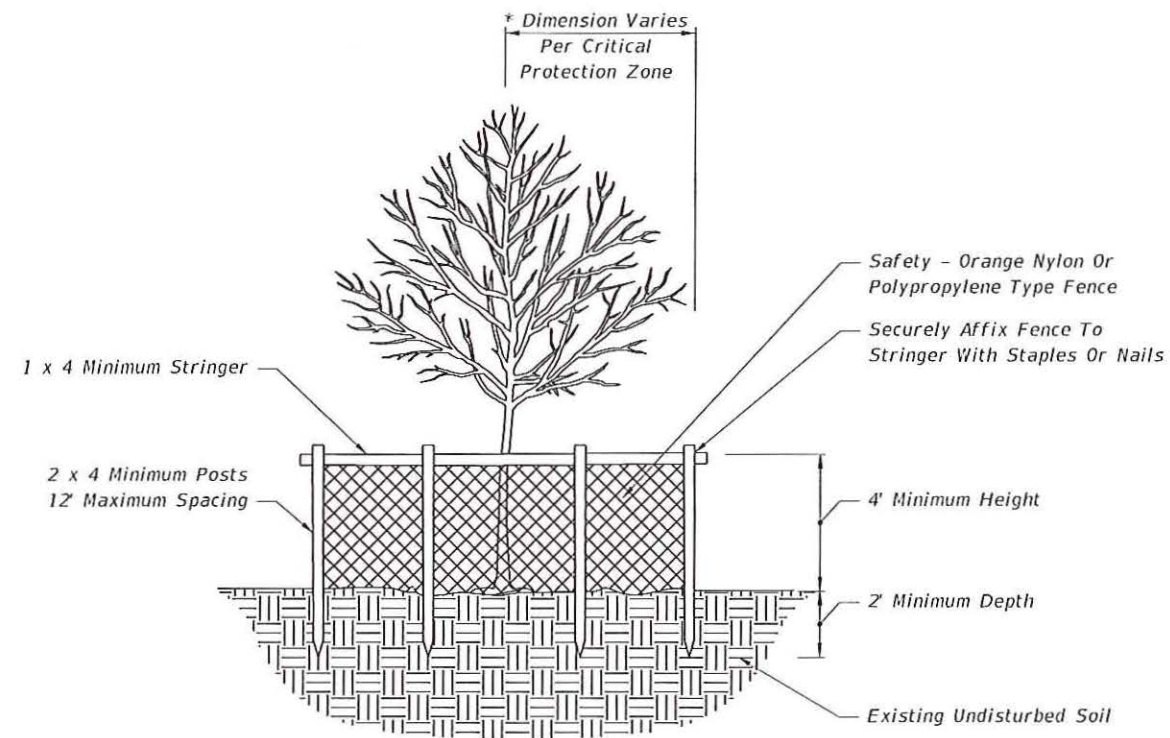

NOTES: Critical Protection Zone: The Area Surrounding A Tree Within A Circle Described By A Radius Of One Foot For Each Inch Of The Tree Trunk Diameter At 54" Above Finished Grade. For Groups Of Trees, Place Barricades Between Trees And Construction Activity.

* Tree Protection Barricades Shall Be Located To Protect A Minimum Of 75% Of The Critical Protection Zone.

TREE PROTECTION BARRICADE

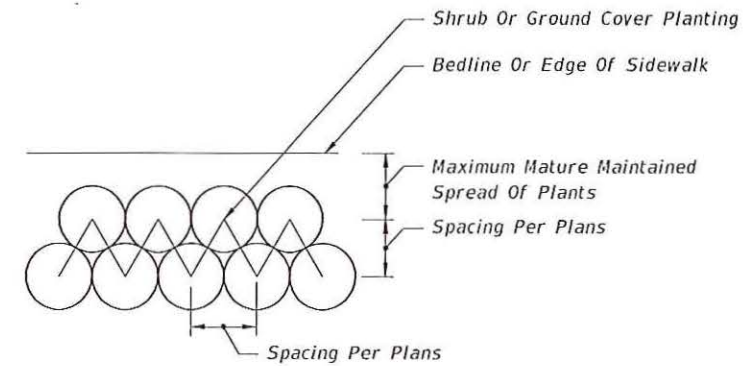

GROUND COVER/SHRUB LAYOUT DETAIL

C:\projects\standards\landscap\00500-s\00544-03.dgn 12/30/2011 11:44:53 AM rdg00rh

LAST REVISION	DESCRIPTION:	FDOT DESIGN STANDARDS FY 2012/2013	LANDSCAPE INSTALLATION	INDEX NO. 544	SHEET NO. 3
07/01/07					

DESIGN NOTES

1. The information shown on this index is intended solely for the purpose of clear sight development and maintenance at intersecting highways, roads and streets, and is not intended to be used to establish roadway and roadside safety except as related to clear sight corridors. An analysis of sight distance shall be documented for all intersections.
2. Details are based on the AASHTO 'A Policy On Geometric Design Of Highways And Streets, 2001', CHAPTER 9, INTERSECTION SIGHT DISTANCE, CASES B and F, and Department practices for channelized median openings (left turns from major roadways).
3. The minimum driver eye setback of 14.5' from the edge of the traveled way may be adjusted on any intersection leg only when justified by a documented, site specific field study of vehicle stopping position and driver eye position.
4. For SIGNALIZED INTERSECTIONS sight distances should be developed based on AASHTO 'Case D-Intersections With Traffic Signal Control'. 'At signalized intersections, the first vehicle stopped on one approach should be visible to the driver of the first vehicle stopped on each of the other approaches. Left- turning vehicles should have sufficient sight distance to select gaps in oncoming traffic and complete left turns. Apart from these sight conditions, there are generally no other approach or departure sight triangles needed for signalized intersections. However, if the traffic signal is to be placed on two -way flashing operation (i.e. flashing yellow on the major -road approaches and flashing red on the minor -road approaches) under off- peak or nighttime conditions, then the appropriate departure sight triangles for Case B, both to the left and to the right, should be provided for the minor -road approaches. In addition, if right turns on a red signal are to be permitted from any approach, then the appropriate departure sight triangle to the left for Case B2 should be provided to accommodate right turns from that approach.'
5. Where curvature, superelevation, adverse split profiles or other conditions preclude the use of standard tree sizes and spacing, proof of view and shadowing restraints must be documented and the size and location of trees in medians detailed in the plans.
6. Intersection sight distance values are provided for Passenger Vehicles, SU Vehicles and Combination Vehicles. Intersection sight distance based on the Passenger Vehicle is suitable for most intersections. Where substantial volumes of heavy vehicles enter the major -road, such as from ramp terminals with stop control or roadways serving truck terminals, the use of tabulated values for SU Vehicles or Combination Vehicles should be considered.

TREE SPACING TABLE**

Description Diameter (Within Limits Of Sight Window)	Speed (mph)													
	30		35		40		45		50		55		60	
	(Inches)													
	>4≤11	>11≤18	>4≤11	>11≤18	>4≤11	>11≤18	>4≤11	>11≤18	>4≤11	>11≤18	>4≤11	>11≤18	>4≤11	>11≤18
	(Feet)													
Minimum Spacing (c. to c. Of Trunk)	22	91	27	108	33	126	40	146	45	165	52	173	60	193

- ** Sizes and spacings are based on the following conditions:
- a. A single line of trees in the median parallel to but not necessarily colinear with the centerline,
- b. A straight approaching mainline, within skew limits as described in No. 2 above.
- c. 1. Trees and palms ≤ 11" in diameter casting a vertical 6' wide shadow band on a vehicle entering at stop bar location when viewed by mainline driver beginning at distance 'd'; see SHADOW DIAGRAM, Sheet 2.
2. Sabal palms with diameters >11" to ≤ 18" spaced at intervals providing a 2 second full view of entering vehicle at stop bar location when viewed by mainline driver beginning at distance 'd'; see PERCEPTION DIAGRAM, Sheet 2.
- d. Trees with diameters ≤ 11" intermixed with trees with diameters >11" ≤ 18" are to be spaced based on trees with diameters >11" ≤ 18".


For any other conditions the tree sizes, spacings and locations shall be detailed in the plans; see Design Note 5.

GENERAL NOTES

1. Details apply to both rural and urban intersections under stop sign control or flashing beacon control. For full signal controlled intersections see Design Note No 4. At intersections listed in the Department's High Crash Intersection Report, designers shall give attention to keeping to a minimum, objects that distract or affect sight distance.
2. Sight distance 'd' applies to normal and skewed intersections (intersecting angles between 60° and 120°), and where vertical and/or horizontal curves are not present. Sight distance 'd' is measured along the major roadway from the center of the entrance lane of the minor roadway to the center of the near approach lane (right or left) of the major roadway. Distances 'd_L' and 'd_R' are measured from the centerline of the entrance lane of the minor roadway to a point on the edge of the near side outer traffic lane on the major roadway. Distance 'd_m' is measured from the centerline of the entrance lane of the minor roadway to a point on the median clear zone limit or horizontal clearance limit for the far side roadway of the major roadway.
3. A. The limits of clear sight define a corridor throughout which a clear sight window must be preserved. See WINDOW DETAIL, Sheet 2.
- B. Clear sight must be provided between vehicles at intersection stop locations, and vehicles on the major roadway within dimension 'd'.
- C. Since observations are made in both directions along the line of sight, the reference datum between roadways is 3'-6" above respective pavements.
4. Barrier systems within intersection sight corridors, where penetration into the sight window might occur, shall be located to provide the least adverse affect practical.
5. The corridor defined by the limits of clear sight is a restricted planting area. Drivers of vehicles on the intersecting roadway and vehicles on the major roadway must be able to see each other clearly throughout the limits of 'd' and 'd_a'. If in the Engineers judgement, landscaping interferes with the line of sight corridor prescribed by these standards the Engineer may rearrange, relocate or eliminate plantings. Plants within the restricted areas are limited to selections as follows:

5. (Cont.)
- Ground Cover & Trunked Plants (Separate or Combined):
- Ground Covers - Plant selection of low growing vegetation which at maturity does not attain a height greater than 18" below the sight line datum. For ground cover in combination with trees and palms; the following heights below the sight line datum will apply:
- 24' for trees and palms ≤ 11" dia.; and, 18' for sabal palms >11" but ≤ 18" dia. (dia.-within Sight Window).
- Trunked Plants - Plant selection of a mature trunk diameter 4" or less measured at 6" above the ground. Canopy or high borne foliage shall never be lower than 5' above the sight line datum. These selections shall be spaced no closer than 20'.
- Trees - Trees can be installed with sod; pavers; gravel, mulch; ground covers or other Department approved material. The clear sight window must be in conformance with the 'WINDOW DETAIL' modified to attain the height requirements listed in 'Ground Covers' above.
- A. Size and spacing shall conform to the Tree Spacing Table.
- B. Requirements for placement within medians at median openings and at unsignalized and signalized intersections:
- a. Horizontal clearance for the mature specimen shall be maintained as specified in Index 700. Specimens whose mature trunk diameter is greater than 18 inches shall not be permitted,
- b. Where left turns from the major road are permitted, no trees shall be located within the distance 'd_b', Sheet 2 of 6; and not less than the distances called for in (c) or (d), as applicable,
- c. For safety, these additional setbacks are required:

1. Where no left turn lane is present, size and spacing shall conform to the Tree Spacing Table. No trees shall be permitted within 100' of the restricted median nose (measured from the edge of pavement),
2. Where left turn lane(s) are present, the following requirements apply:
- For low speed facilities (design speed less than 50 mph), size and spacing shall conform to the Tree Spacing Table. No trees shall be permitted within 100' of the restricted median nose (measured from the edge of pavement).
 - For high speed facilities (design speed 50 mph or greater), no trees shall be permitted within 200' of the restricted median nose. Beyond this limit, size and spacing shall conform to the Tree Spacing Table.

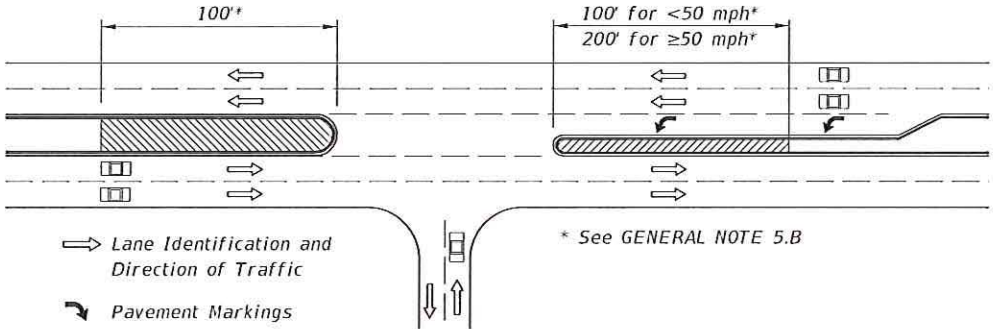

PLAN
Special Areas Limited to Ground Cover

LAST
REVISION
07/01/10

REVISION

DESCRIPTION:




FDOT DESIGN STANDARDS
FY 2012/2013

SIGHT DISTANCE AT INTERSECTIONS

INDEX
NO.
546


SHEET
NO.
1

C:\projects\standards\roadway\00500-00546-02.dgn
rdg60rh
11:44:56 AM
12/30/2011

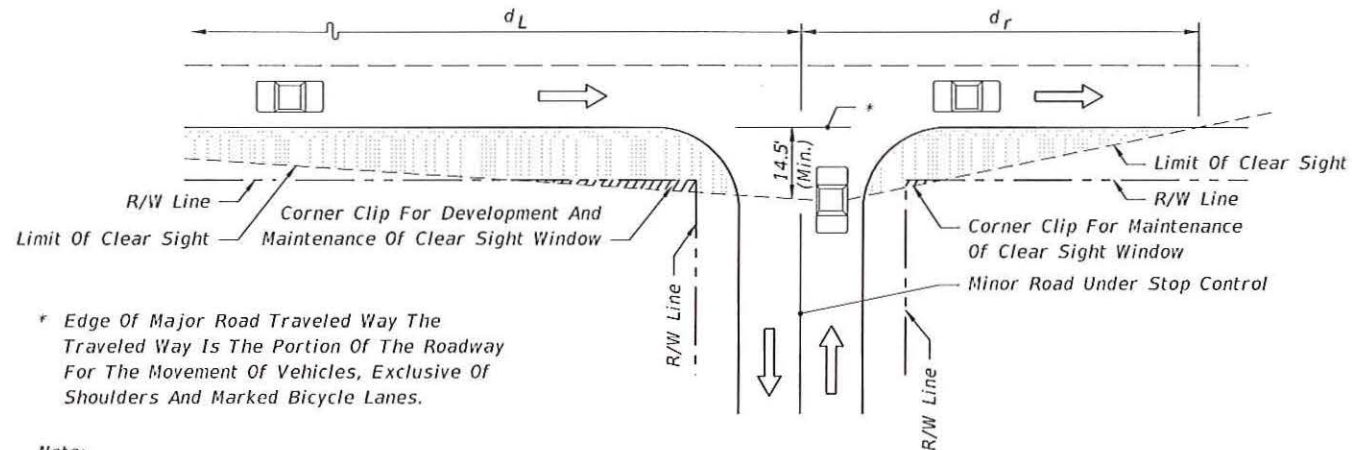


Note:
Lines For 'Limit of Clear Sight' Are Opposite
Hand When Major Road Near Lane Traffic
Moving Left (e.g., One-Way Left).

PICTORIAL
ORIGIN OF CLEAR SIGHT LINE
ON MINOR ROAD

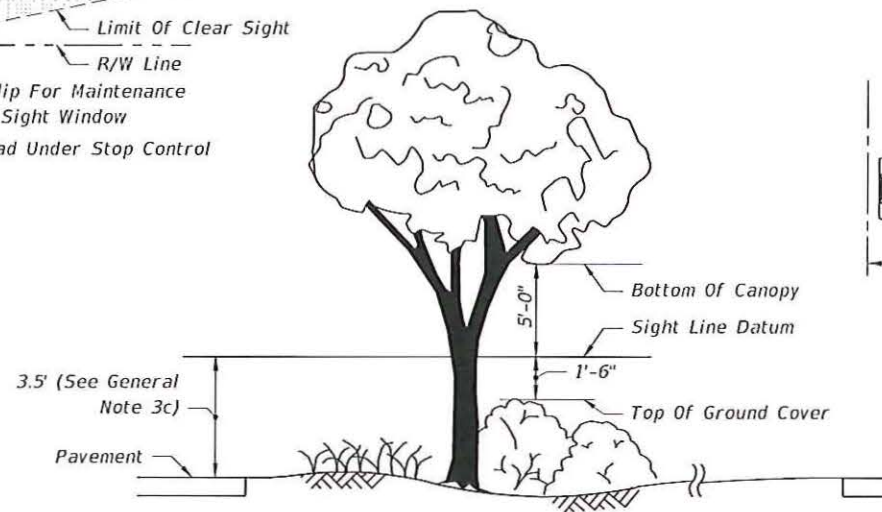

The Intent Of This Standard Is To Provide A Window With Vertical
Limits Of Not Less Than 5' Above And 1'-6" Below The Sight Line
Datum, And Horizontal Limits Defined By The Limits Of Clear Sight.

PICTORIAL
WINDOW DETAIL

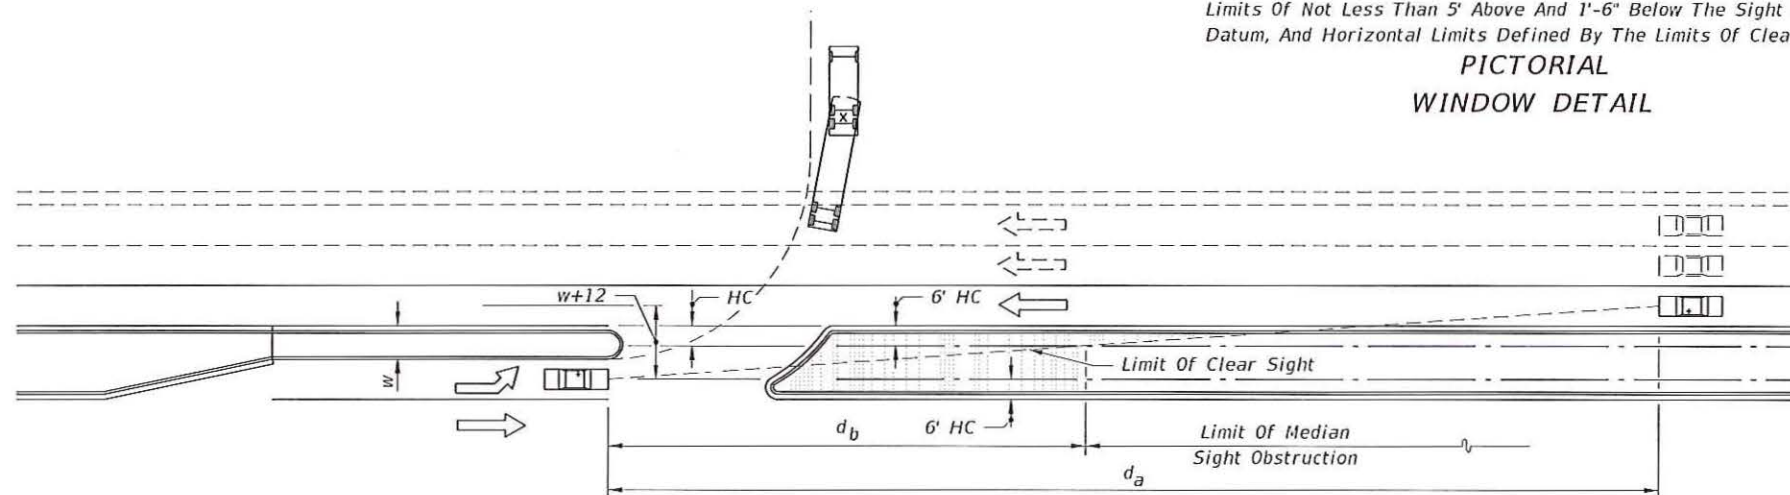


PICTORIAL

Design Speed MPH	d _a (Feet)								
	1 Lane Crossed			2 Lanes Crossed			3 Lanes Crossed		
	P	SU	Comb.	P	SU	Comb.	P	SU	Comb.
30	245	290	330	265	320	365	290	350	395
35	285	335	385	310	370	425	335	410	460
40	325	385	440	355	425	485	385	465	525
45	365	430	495	400	475	545	430	525	590
* See Note									


* The d_a values in this table were established by the method referenced in Design Note 2, and are applicable to urban, predominantly curbed roadways with design speeds of 45 mph or less and meeting the restricted conditions defined in Index No. 700. For horizontal clearance (HC) of six feet (6'), the values for d_b may be determined by the equation $d_b = d_a (w/(w+12))$. For roadways with nonrestricted conditions, d_a and d_b should be based on the geometry for the left turn storage and on clear zone widths (See Index No. 700).

For wide medians where the turning vehicle can approach the through lanes at or near 90°, use d_v values from tables on sheets 5 or 6. (The clear sight line origin is assumed to be 14.5' from the edge of the near lane.)

CHANNELIZED DIRECTIONAL MEDIAN OPENINGS

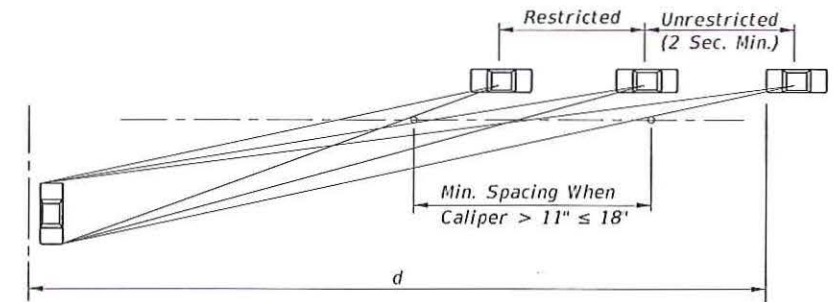

PERCEPTION DIAGRAM
SETTING SABAL PALM (STATE TREE) SPACING

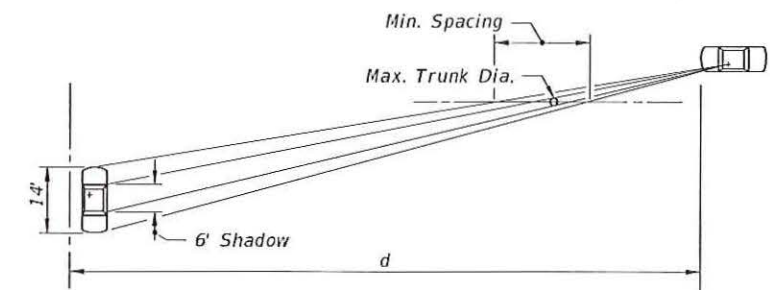

SHADOW DIAGRAM

LEGEND

Areas Free Of Sight Obstructions

LAST
REVISION
07/01/10

DESCRIPTION:




FDOT DESIGN STANDARDS
FY 2012/2013


SIGHT DISTANCE AT INTERSECTIONS

INDEX
NO.
546


SHEET
NO.
2

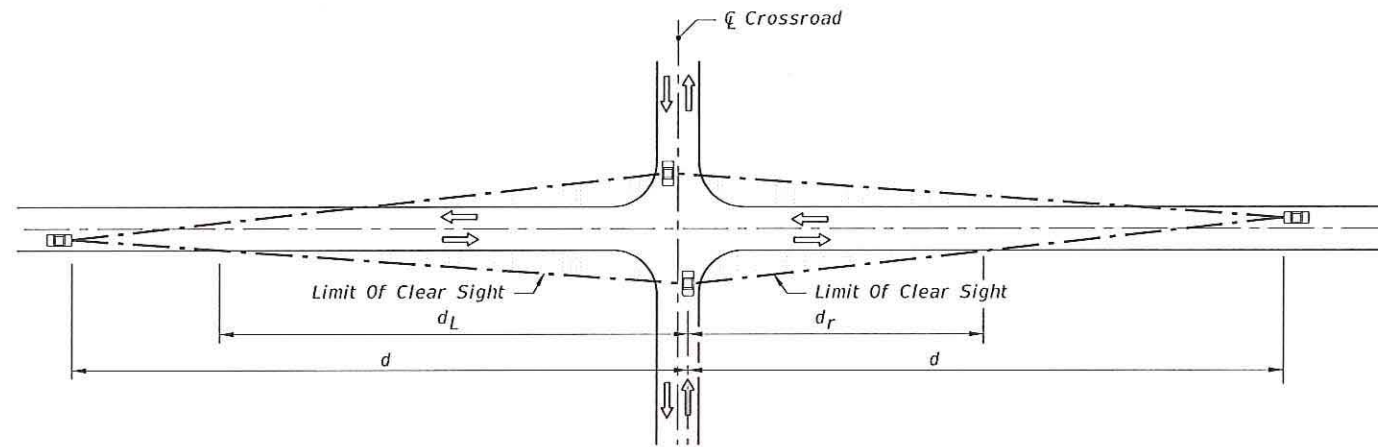

PICTORIAL
2 LANE UNDIVIDED

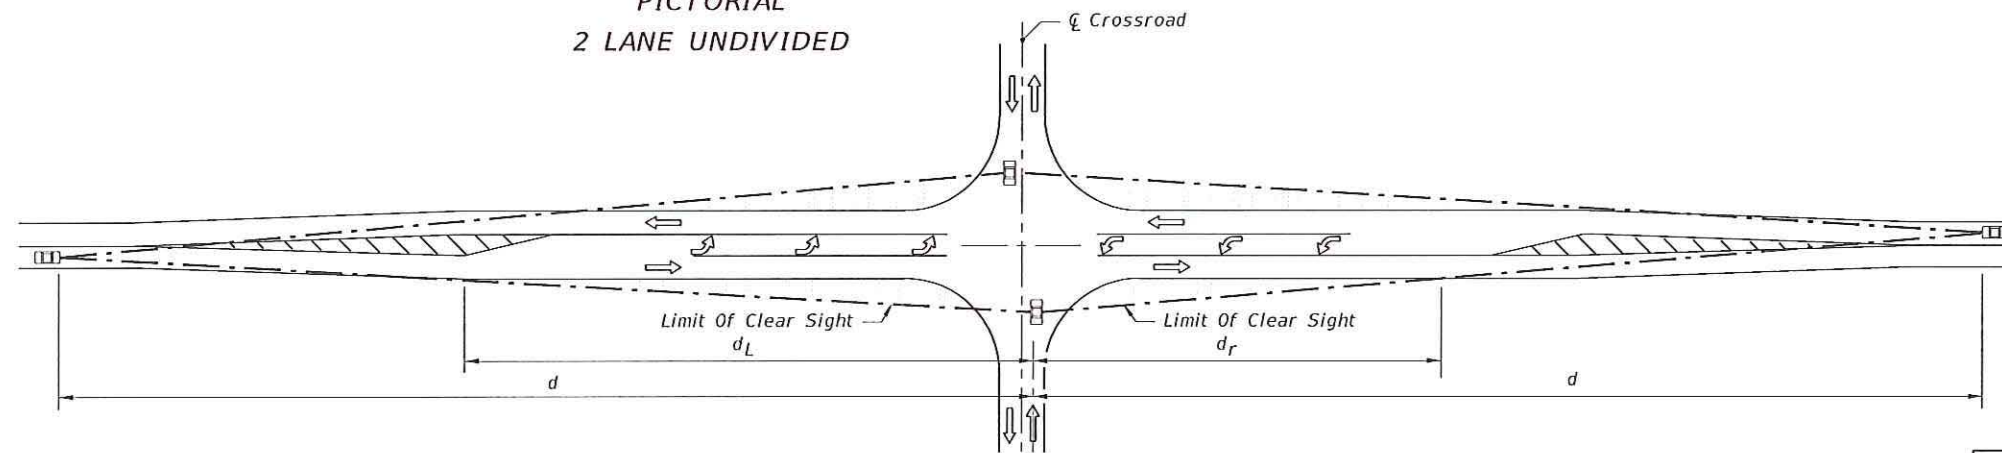

PICTORIAL
2 LANE 2 WAY • FLARED FOR OPPOSING LEFT TURN CENTERED ON ALIGNMENT

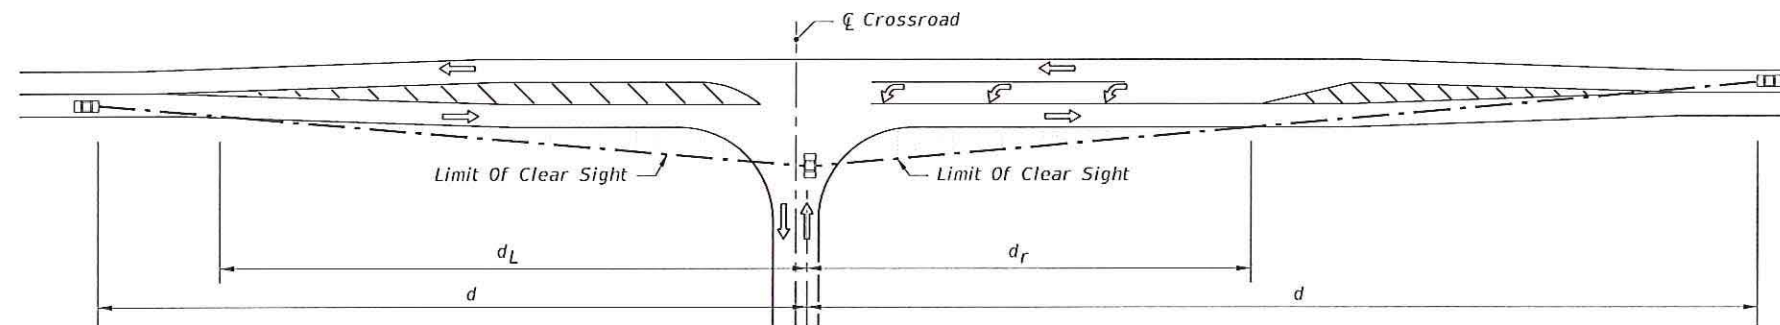

PICTORIAL
2 LANE 2 WAY • FLARED FOR SINGLE SIDE LEFT TURN CENTERED ON ALIGNMENT

Design Speed	d	d _L	d _r
30	335	240	150
35	390	275	175
40	445	315	200
45	500	350	225
50	555	390	250
55	610	430	275
60	665	470	300
65	720	510	325

Passenger Vehicle

Design Speed	d	d _L	d _r
30	420	295	190
35	490	345	220
40	560	395	250
45	630	445	280
50	700	495	310
55	770	545	345
60	840	595	375
65	910	645	405

SU Vehicle

Design Speed	d	d _L	d _r
30	510	360	225
35	595	420	265
40	680	480	305
45	765	540	340
50	845	600	375
55	930	660	415
60	1015	720	450
65	1100	780	490

Combination Vehicle

SIGHT DISTANCE (d) AND RELATED DISTANCES (d_L, d_r) (FEET)

2 LANE UNDIVIDED

Design Speed	d	d _L	d _r
30	355	195	135
35	415	225	155
40	475	260	180
45	530	290	200
50	590	325	220
55	650	355	245
60	710	390	265
65	765	420	290

Passenger Vehicle

Design Speed	d	d _L	d _r
30	450	250	170
35	525	290	200
40	600	330	225
45	675	370	255
50	750	410	285
55	825	450	310
60	900	490	340
65	975	530	370

SU Vehicle

Design Speed	d	d _L	d _r
30	540	295	205
35	630	345	240
40	720	395	270
45	810	445	305
50	900	495	340
55	990	540	375
60	1080	590	405
65	1170	640	440

Combination Vehicle

SIGHT DISTANCE (d) AND RELATED DISTANCES (d_L, d_r) (FEET)

2 LANE 2 WAY • FLARED FOR LEFT TURNS

LEGEND

Areas Free Of Sight Obstructions

NOTE: See Sheet 2 for intersecting roadway origin of clear sight and quadrant corner clips.

C:\projects\standards\roadway\00500-s\00546-03.dgn

rd0607h

11:44:57 AM

12/30/2011

LAST
REVISION
04

DESCRIPTION:




FDOT DESIGN STANDARDS
FY 2012/2013

SIGHT DISTANCE AT INTERSECTIONS

INDEX
NO.
546

SHEET
NO.
3

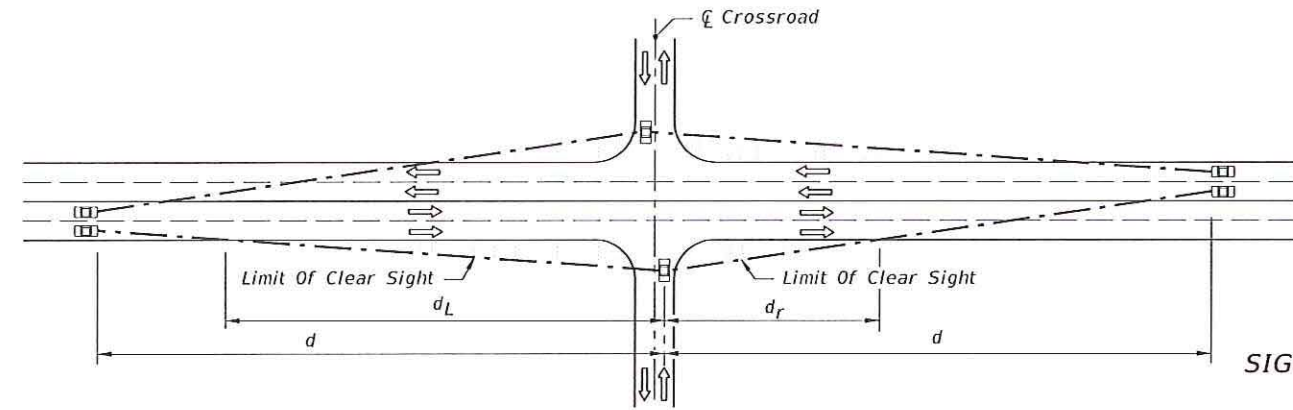

PICTORIAL
4 LANE UNDIVIDED

Design Speed	d	d _L	d _R
30	355	250	115
35	415	295	135
40	475	335	155
45	530	375	175
50	590	415	195
55	650	460	210
60	705	500	230
65	765	540	250

Passenger Vehicle


Design Speed	d	d _L	d _R
30	450	320	150
35	525	370	170
40	600	425	195
45	675	475	220
50	750	530	245
55	825	585	270
60	900	635	295
65	975	690	320

SU Vehicle

Design Speed	d	d _L	d _R
30	540	380	175
35	630	445	205
40	720	510	235
45	810	570	265
50	900	635	295
55	990	700	320
60	1080	765	350
65	1170	825	380

Combination Vehicle

SIGHT DISTANCE (d) AND RELATED DISTANCES (d_L, d_R) (FEET)
4 LANE UNDIVIDED

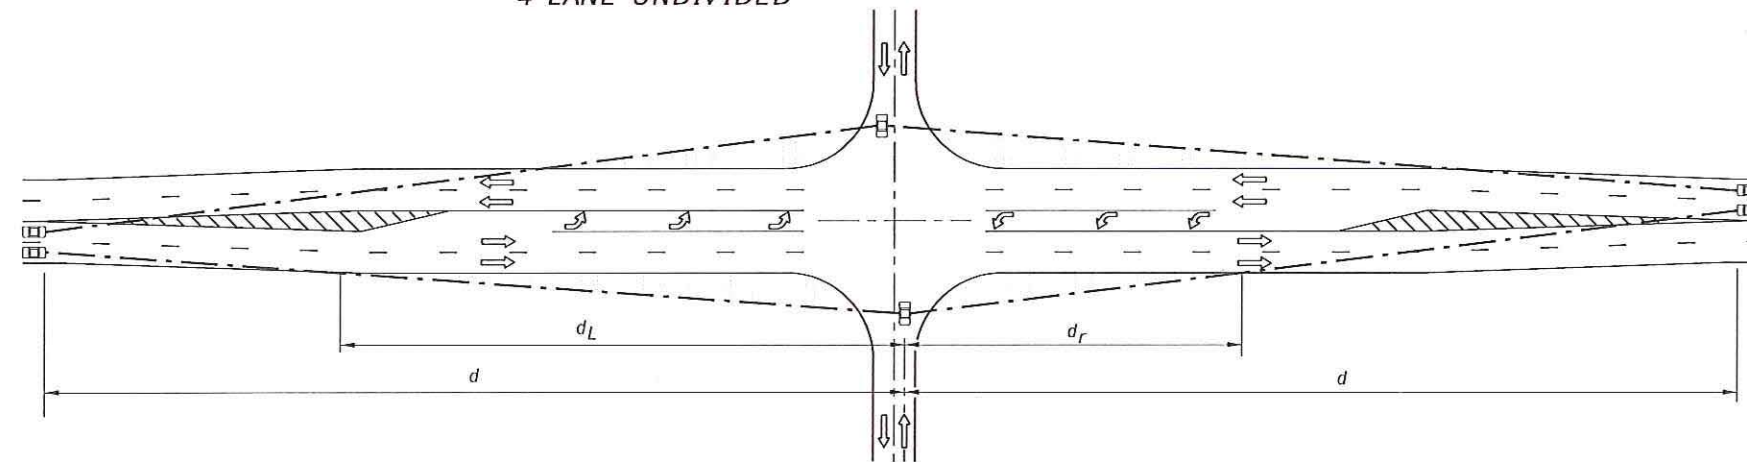

PICTORIAL
4 LANE UNDIVIDED FLARED - SYMMETRICAL

Design Speed	d	d _L	d _R
30	375	205	120
35	440	240	145
40	500	275	165
45	565	310	185
50	625	340	205
55	690	375	225
60	750	410	245
65	815	445	265

Passenger Vehicle


Design Speed	d	d _L	d _R
30	480	220	155
35	560	255	180
40	640	290	210
45	720	330	235
50	800	365	260
55	880	400	285
60	960	440	310
65	1040	480	340

SU Vehicle

Design Speed	d	d _L	d _R
30	570	310	185
35	665	365	215
40	760	415	250
45	855	470	280
50	950	520	310
55	1045	570	340
60	1140	625	370
65	1235	675	400

Combination Vehicle

SIGHT DISTANCE (d) AND RELATED DISTANCES (d_L, d_R) (FEET)
4 LANE UNDIVIDED FLARED - SYMMETRICAL

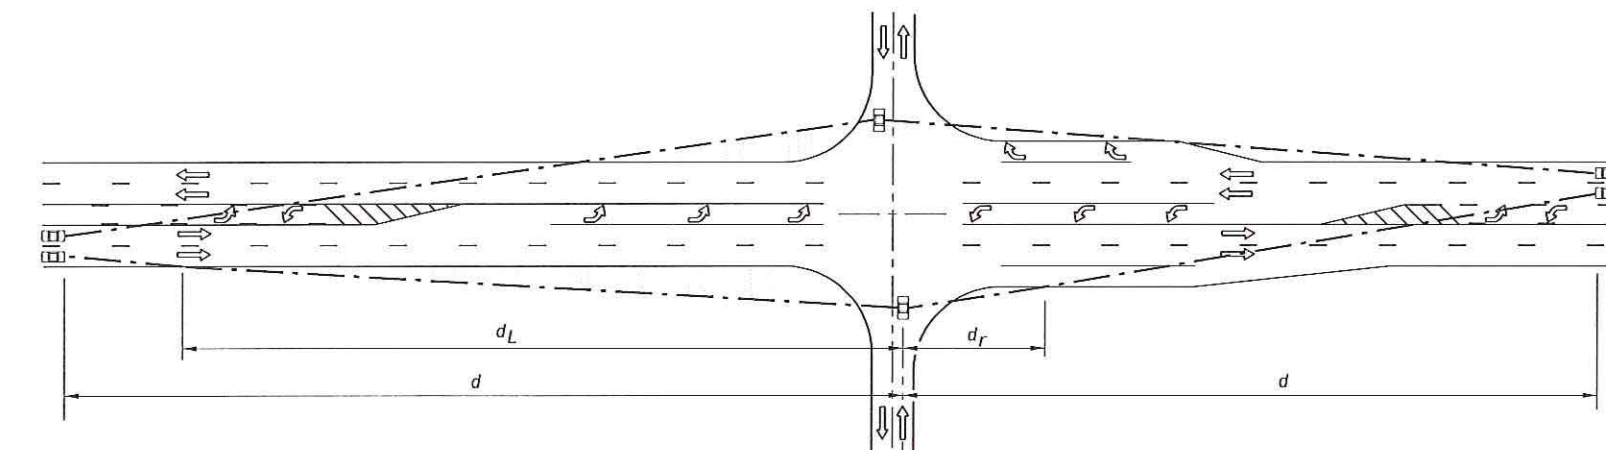

PICTORIAL
4 LANE UNDIVIDED WITH OPTIONAL LANE

Design Speed	d	d _L	d _R
30	375	265	95
35	440	310	115
40	500	355	130
45	565	400	145
50	625	440	160
55	690	490	172
60	750	530	195
65	815	575	210

Passenger Vehicle

Design Speed	d	d _L	d _R
30	480	340	125
35	560	395	145
40	640	450	165
45	720	510	185
50	800	565	205
55	880	620	225
60	960	680	245
65	1040	735	265

SU Vehicle

Design Speed	d	d _L	d _R
30	570	405	145
35	665	470	170
40	760	540	195
45	855	605	220
50	950	670	245
55	1045	740	270
60	1140	805	295
65	1235	875	320

Combination Vehicle

SIGHT DISTANCE (d) AND RELATED DISTANCES (d_L, d_R) (FEET)
4 LANE UNDIVIDED WITH OPTIONAL LANE

LEGEND

Areas Free Of Sight Obstructions

NOTE: See Sheet 2 for intersecting roadway origin of clear sight and quadrant corner clips.

C:\projects\standards\roadway\00500-04.dgn
12/30/2011 11:44:57 AM rd0607h

LAST
REVISION
04

REVISION

DESCRIPTION:



FDOT DESIGN STANDARDS
FY 2012/2013

SIGHT DISTANCE AT INTERSECTIONS

INDEX
NO.
546

SHEET
NO.
4

C:\p\projects\standards\roadway\00500-s\00546-05.dgn

rd0607h

11:44:58 AM

12/30/2011

MEDIAN 22' OR LESS				
Design Speed	d	d _L	d _r	d _m
30	390	280	90	320
35	460	330	100	380
40	520	370	110	430
45	590	420	130	480
50	650	460	140	530
55	720	510	160	590
60	780	550	170	640
65	850	600	190	700

PASSENGER VEHICLE (P)

MEDIAN 35' OR LESS				
Design Speed	d	d _L	d _r	d _m
30	540	380	100	460
35	630	450	110	530
40	720	510	130	610
45	810	570	150	690
50	900	640	160	760
55	990	700	180	840
60	1080	760	200	920
65	1170	830	210	990

SINGLE-UNIT TRUCK (SU)

MEDIAN 30' OR LESS				
Design Speed	d	d _L	d _r	d _m
30	620	440	120	520
35	720	510	140	600
40	820	580	160	690
45	930	660	180	780
50	1030	730	200	860
55	1130	800	220	950
60	1240	880	240	1040
65	1340	950	260	1120

INTERMEDIATE SEMI-TRAILERS (WB-40 & WB-50)


25'-64' MEDIAN				
Design Speed	d	d _L	d _v	d _{vL}
30	290	210	330	230
35	330	230	390	280
40	380	270	440	310
45	430	300	500	350
50	480	340	550	390
55	530	370	610	430
60	570	400	660	470
65	620	440	720	510

40'-64' MEDIAN				
Design Speed	d	d _L	d _v	d _{vL}
30	370	260	420	300
35	440	310	490	350
40	500	350	560	400
45	560	400	630	450
50	620	440	700	500
55	690	490	770	540
60	750	530	840	590
65	810	570	910	640

64' MEDIAN				
Design Speed	d	d _L	d _v	d _{vL}
30	460	330	510	360
35	540	380	590	420
40	620	440	680	480
45	690	490	760	540
50	770	540	850	600
55	850	600	930	660
60	920	650	1020	720
65	1000	710	1100	780

SIGHT DISTANCES (d) & (d_v) AND RELATED DISTANCES (d_L, d_r, d_m & d_{vL}) (FEET)

4 LANE DIVIDED ROADWAY

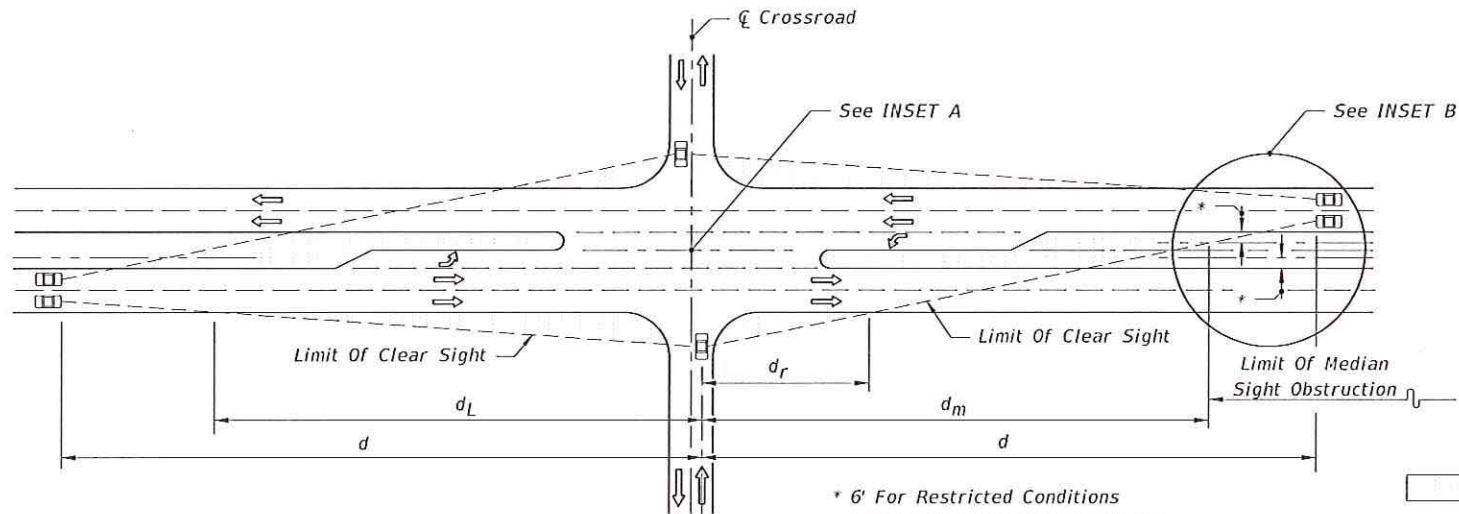


PLAN

PICTORIAL

* 6' For Restricted Conditions
CZ For Nonrestricted Conditions
See Index No. 700


LEGEND

Areas Free Of Sight Obstructions

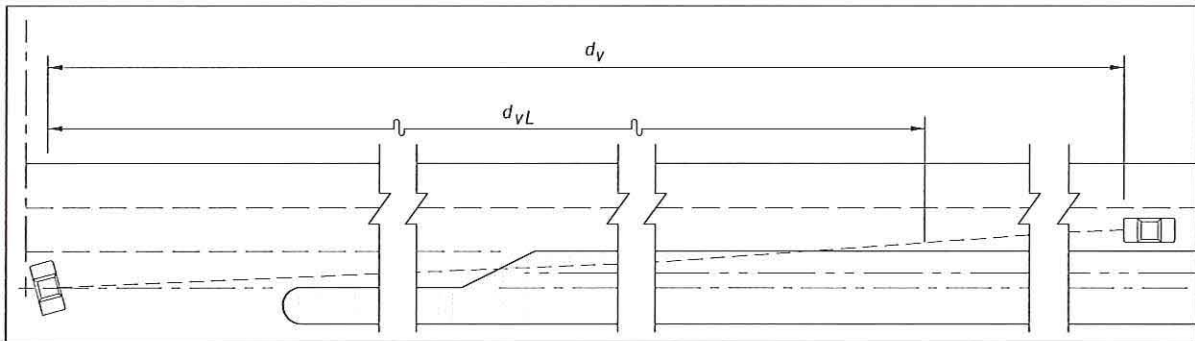

Where The Median Is Sufficiently Wide For The Design Vehicle To Pause In The Median Vehicle Length Plus 6' Min.) The Clear Line Of Sight To The Right (d_v) Is Measured From The Vehicle Pause Location, i.e., Not From The Cross Road Stop Position; Distances d_r & d_m Do Not Apply.

INSET A

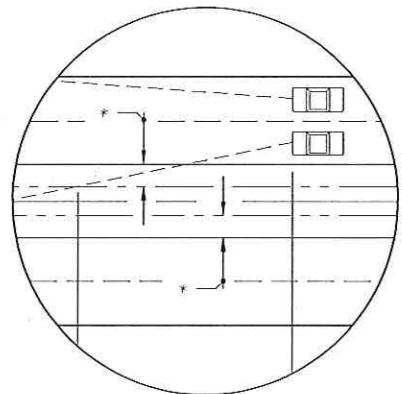

INSET B

NOTES FOR 4-LANE DIVIDED ROADWAY

- See Sheet 2 for origin of clear sight line on the minor road.
- Values shown in the tables are the governing (controlling) sight distances calculated based on 'AASHTO Case B - Intersection with Stop Control on the Minor Road.'

Vehicle Type	Vehicle Length (Ft.)
Passenger (P)	19
Single Unit (SU)	30
Large School Bus	40
WB-40	45.5
WB-50	55

LAST REVISION	DESCRIPTION:
07/01/10	



FDOT DESIGN STANDARDS
FY 2012/2013

SIGHT DISTANCE AT INTERSECTIONS

INDEX NO.	SHEET NO.
546	5

C:\projects\standards\roadway\00500-s\00546-06.dgn

rd060/h

11:44:50 AM

12/30/2011

MEDIAN 22' OR LESS				
Design Speed	d_x	d_L	d_r	d_m
30	410	290	80	350
35	480	340	90	410
40	550	390	100	470
45	620	440	110	530
50	690	490	130	580
55	760	540	140	640
60	830	590	150	700
65	900	640	170	760

PASSENGER VEHICLE (P)

MEDIAN 35' OR LESS				
Design Speed	d_x	d_L	d_r	d_m
30	590	420	90	510
35	690	490	110	600
40	780	550	120	680
45	880	620	140	760
50	980	690	160	850
55	1080	760	170	940
60	1170	830	190	1020
65	1270	900	200	1100

SINGLE-UNIT TRUCK (SU)

MEDIAN 30' OR LESS				
Design Speed	d_x	d_L	d_r	d_m
30	670	470	110	580
35	780	550	130	670
40	890	630	150	770
45	1000	710	170	860
50	1110	790	190	960
55	1220	860	200	1050
60	1330	940	220	1150
65	1440	1020	240	1240


INTERMEDIATE SEMI-TRAILERS (WB-40 & WB-50)

25'-64' MEDIAN				
Design Speed	d	d_L	d_v	d_{vL}
30	310	220	330	230
35	360	250	390	280
40	410	290	440	310
45	460	330	500	350
50	510	360	550	390
55	570	400	610	430
60	620	440	660	470
65	670	470	720	510


40'-64' MEDIAN				
Design Speed	d	d_L	d_v	d_{vL}
30	410	290	420	300
35	470	330	490	350
40	540	380	560	400
45	610	430	630	450
50	680	480	700	500
55	740	520	770	540
60	810	570	840	590
65	880	620	910	640

35'-50' MEDIAN				
Design Speed	d_x	d_L	d_r	d_m
30	720	510	100	640
35	830	590	110	740
40	950	670	130	840
45	1070	760	150	950
50	1190	840	160	1060
55	1310	930	180	1160
60	1430	1010	190	1270
65	1550	1100	210	1380

64' MEDIAN				
Design Speed	d	d_L	d_v	d_{vL}
30	490	350	510	360
35	580	410	590	420
40	660	470	680	480
45	740	520	760	540
50	820	580	850	600
55	910	640	930	660
60	990	700	1020	720
65	1070	760	1100	780

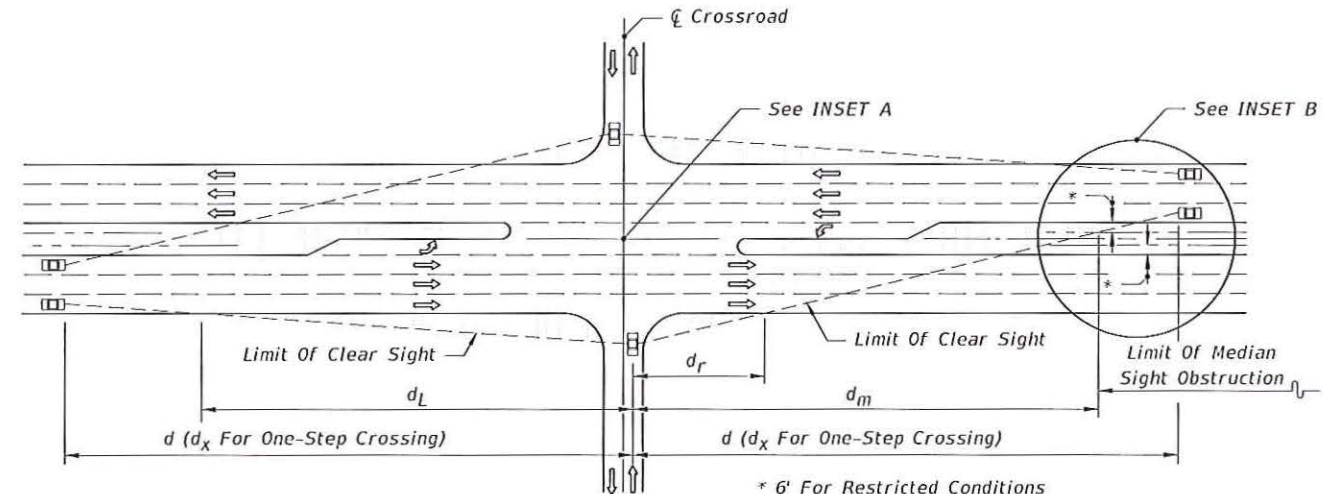


PLAN
PICTORIAL

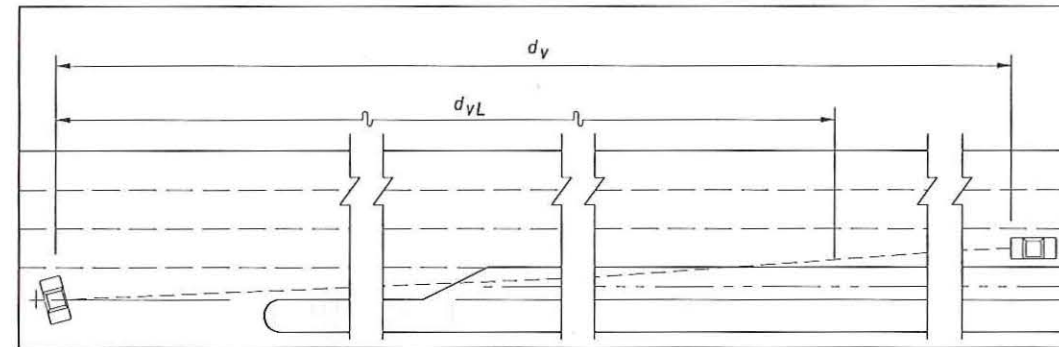

Where The Median Is Sufficiently Wide For The Design Vehicle To Pause In The Median (Vehicle Length Plus 6' Min.) The Clear Line Of Sight To The Right (d_v) Is Measured From The Vehicle Pause Location, i.e., Not From The Cross Road Stop Position; Distances d_r & d_m Do Not Apply.

INSET A

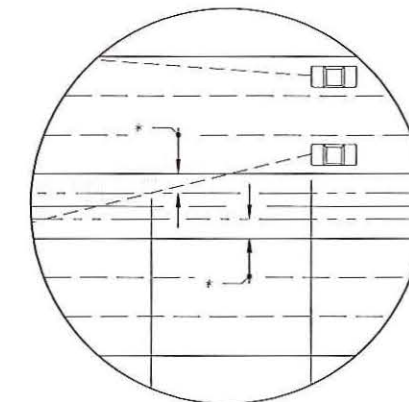

INSET B

NOTES FOR 6-LANE DIVIDED ROADWAY

1. See Sheet 2 for origin of clear sight line on the minor road.
2. Values shown in the tables are the governing (controlling) sight distances calculated based on 'AASHTO Case B - Intersection with Stop Control on the Minor Road.'

SIGHT DISTANCES (d), (d_v) & (d_x) AND RELATED DISTANCES (d_L , d_r , d_m & d_{vL}) (FEET)

6 LANE DIVIDED

LAST REVISION	DESCRIPTION:	FDOT DESIGN STANDARDS FY 2012/2013	SIGHT DISTANCE AT INTERSECTIONS	INDEX NO. 546	SHEET NO. 6
07/01/10					


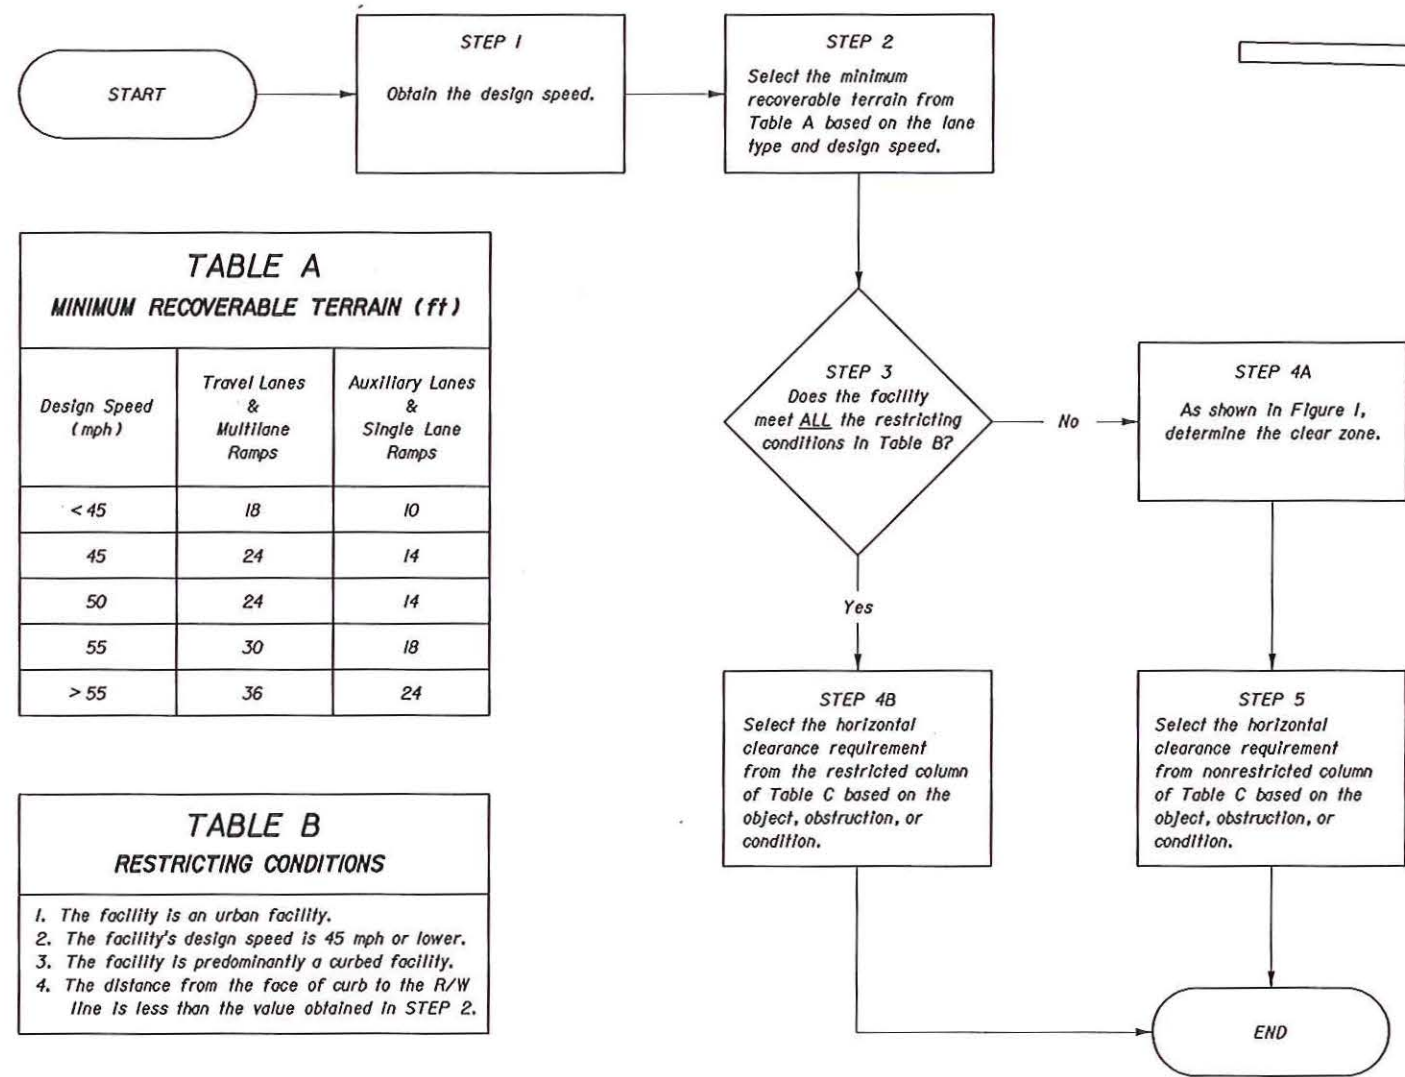


TABLE A MINIMUM RECOVERABLE TERRAIN (ft)		
Design Speed (mph)	Travel Lanes & Multilane Ramps	Auxiliary Lanes & Single Lane Ramps
< 45	18	10
45	24	14
50	24	14
55	30	18
> 55	36	24

TABLE B RESTRICTING CONDITIONS
1. The facility is an urban facility. 2. The facility's design speed is 45 mph or lower. 3. The facility is predominantly a curbed facility. 4. The distance from the face of curb to the R/W line is less than the value obtained in STEP 2.

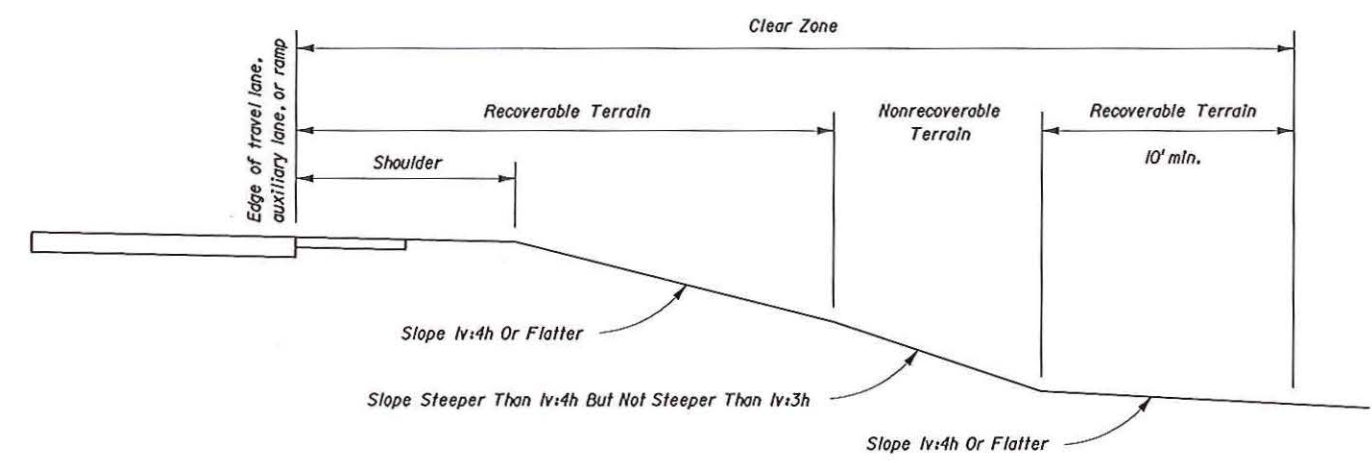

Clear Zone is the relatively flat unobstructed area that is to be provided for safe use by errant vehicles, and must be wide enough so that the sum of all the recoverable terrain within is equal to or greater than the value obtained in STEP 2. Recoverable terrain provided beyond nonrecoverable terrain must be a minimum of 10 feet. Areas beyond nontraversable and hazardous terrain cannot be used as recoverable or nonrecoverable terrain.

Roadside Terrain includes all surfaces along the roadway other than travel lanes, auxiliary lanes, and ramps. For the purpose of establishing clear zones and horizontal clearance requirements, roadside terrain is defined as recoverable, nonrecoverable, non-traversable, and hazardous as follows:


Recoverable when it is safely traversable and on a slope that is 1v:4h or flatter.
Nonrecoverable when it is safely traversable and on a slope that is steeper than 1v:4h but not steeper than 1v:3h.
Nontraversable when it is not safely traversable or on a slope that is steeper than 1v:3h.
Hazardous when a slope is steeper than 1v:3h and deeper than 6 feet as shown in Figure 2.

Horizontal Clearance Requirements are shown in Table C and are the required offsets to an object from a specified point on the roadway.

ROADSIDE TERRAIN
FIGURE 1

PROCESS FOR DETERMINING HORIZONTAL CLEARANCE REQUIREMENTS AND CLEAR ZONES

TABLE C			
	Item No.	OBJECTS, OBSTRUCTIONS OR CONDITIONS	HORIZONTAL CLEARANCE REQUIREMENTS
			Restricted Nonrestricted
GENERAL	1	Above ground fixed hazards: All roadside objects, obstructions or conditions other than those listed below that exceed 4 inches in height and pose a hazard to errant vehicles and vehicle occupants.	Locate as close to the Right Of Way as practical and not less than 4 feet from face of curb. Locate outside the clear zone as close to the Right Of Way as practical.
ROADWAY	2	All FDOT approved guardrails, crash cushions, permanent or temporary concrete barriers, and guardrail end terminals.	Locate as shown in the Design Standards. Locate as shown in the Design Standards.
	3	Drop-off hazards: Any point along a roadside slope steeper than 1v:3h that is deeper than 6 feet below the hinge point. See Figure 2.	Locate the point that is 6 feet below the hinge point no less than 22 feet from the traveled way. Treat as roadside slopes in accordance with Design Standard 400.
	4	Mailboxes not shown in Design Standard 532.	Not to be used. Not to be used.
	5	Mailboxes shown in Design Standard 532.	Locate in accordance with Design Standard 532. Locate in accordance with Design Standard 532.
	6	Trees expected to become greater than 4 inches in diameter measured 6 inches above the ground.	Outside roadways: Locate no less than 4 feet from face of curb in accordance with Design Standard 546. Inside medians: Locate no less than 6 feet from the edge of traffic lane and in accordance with Design Standard 546. Locate outside the clear zone as close to the Right Of Way as practical and in accordance with Design Standard 546.
	7	Trees not expected to become greater than 4 inches in diameter measured 6 inches above the ground.	Locate in accordance with Design Standard 546. Locate in accordance with Design Standard 546.
	8	Canals behind guardrail.	Locate no less than 5 feet from the back of the guardrail post. Locate no less than 5 feet from the back of the guardrail post.
	9	Canals without guardrail.	Locate as close to the Right Of Way as practical and not less than 40 feet from the traveled way. Design speeds of 50 mph and greater: Locate as close to the Right Of Way as practical and not less than 60 feet from the traveled way. Design speeds less than 50 mph: Locate as close to the Right Of Way as practical and not less than 50 feet from the traveled way.
DRAINAGE	10	Culvert wing wall, endwall, retaining walls and flared end sections less than 6 feet deep.	Locate no less than 4 feet from face of curb. Locate outside the clear zone.
	11	Culvert wing wall, endwall, retaining walls and flared end sections 6 feet and greater in depth.	Treat as drop-off hazard; See Item No. 3. Treat as drop-off hazard; See Item No. 3.
	12	Mitered end sections.	Locate as shown in Design Standards 272 and 273. Locate as shown in Design Standards.
TRAFFIC CONTROL DEVICES	13	Frangible sign supports.	Locate no less than 4 feet from face of curb and in accordance with Design Standard 17302. Locate in accordance with Design Standard 17302.
	14	Overhead sign supports and other nonfrangible signs.	Locate no less than 4 feet from face of curb. Locate outside the clear zone.
	15	Signal controller cabinets, signal poles, strain poles and mast arms.	Locate no less than 4 feet from face of curb and not in medians. Locate outside the clear zone and not in medians.
LIGHTING	16	Conventional lighting (frangible and nonfrangible).	Locate no less than 4 feet from face of curb and not in medians. Locate 20 feet from travel lanes or 14 feet from auxiliary lanes. Not in medians. May be clear zone width when the clear zone is less than 20 feet.
	17	Highmast lighting.	Not applicable. Locate outside the clear zone.
STRUCTURES	18	Bridge piers and abutments: Above ground vertical structures.	Locate not less than 16 feet from edge of travel lane. Locate outside the clear zone.
UTILITIES	19	Fire hydrants with bases no higher than 4 inches above the ground.	Locate not less than 2 feet from face of curb. Locate as close to the Right Of Way as practical.
	20	Utility installations: All above ground fixed objects.	Locate as close to the Right Of Way as practical and not less than 4 feet from face of curb and not in medians. Locate outside the clear zone as close to the Right Of Way as practical and not in medians and not within limited access facilities. May be placed 4 feet behind the back of shields that have been justified for other reasons.
RAILROADS	21	Railroad crossing traffic control devices.	Locate in accordance with Design Standard 17882. Locate in accordance with Design Standard 17882.

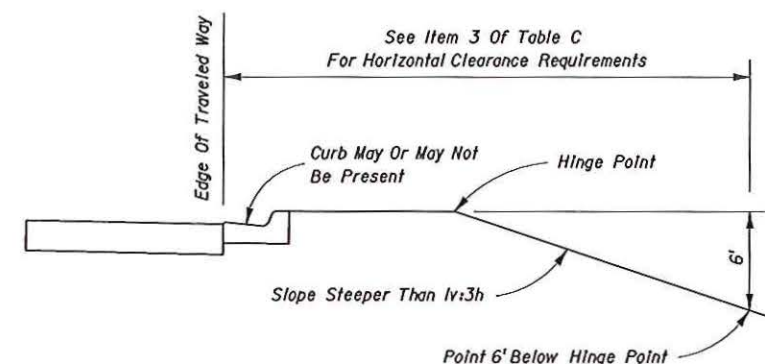

DROP-OFF HAZARDS

FIGURE 2

GENERAL NOTES


- When sidewalks are present, an unobstructed sidewalk width of at least 4 feet must be provided.
- When site specific conditions prohibit meeting the horizontal clearance requirements in TABLE C, the object, obstruction or condition must be mitigated, possibly by shielding. Otherwise, the Plans Preparation Manual, Volume 1, Chapters 2, 4, 21 and 25, or Chapters 5 and 9 of the Utility Accommodation Manual must be researched to determine viable alternatives. The minimum requirements in these manuals can only be reduced when a Design Variation or Design Exception has been approved in accordance with Chapter 23 of the Plans Preparation Manual, Volume 1 or a Utility Exception has been approved in accordance with Chapter 13 of the Utility Accommodation Manual.




2008 FDOT Design Standards

ROADSIDE OFFSETS

Last Revision	Sheet No.
04	2 of 2
Index No.	
700	

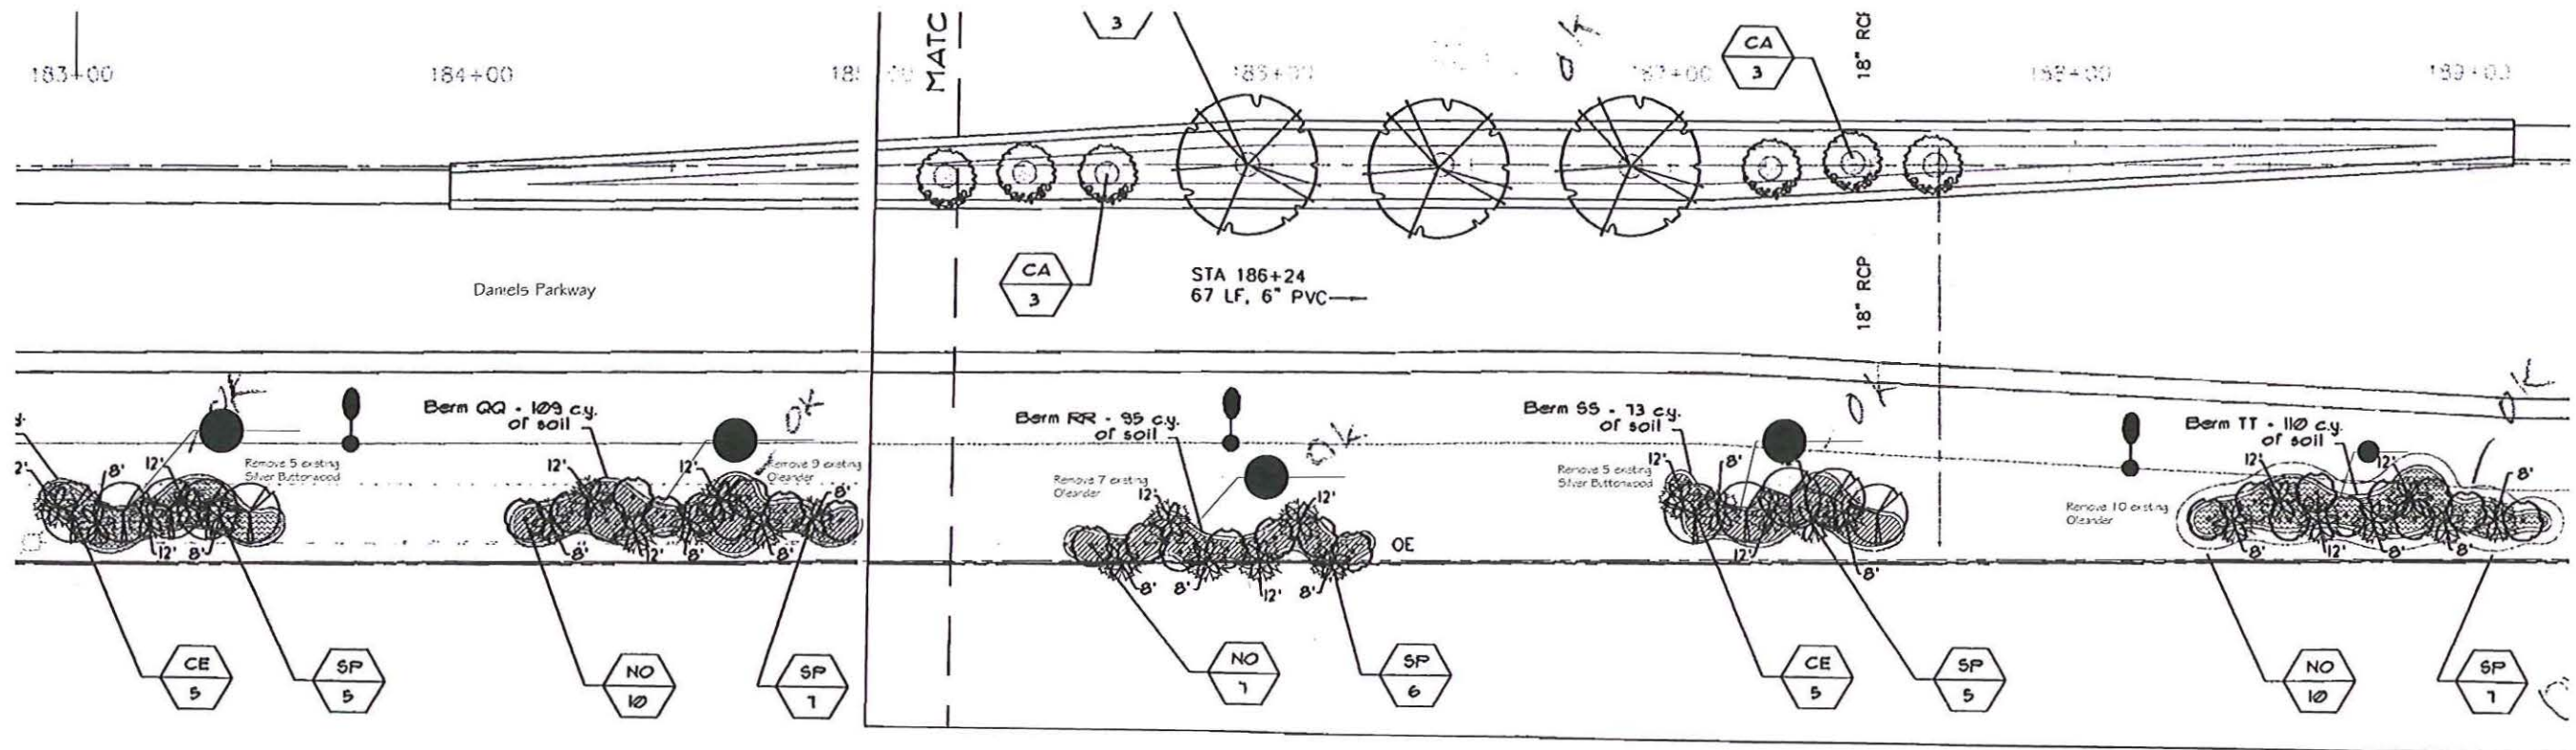

○ Shops of Plantation ROW Planting Modifications



PRELIMINARY PLANS