
LEE COUNTY BOARD OF COUNTY COMMISSIONERS

Public Works Administration Department of Transportation

Map Locations of Proposed

LEHIGH ARTERIALS/COLLECTORS RESURFACING ROADWAY IMPROVEMENT

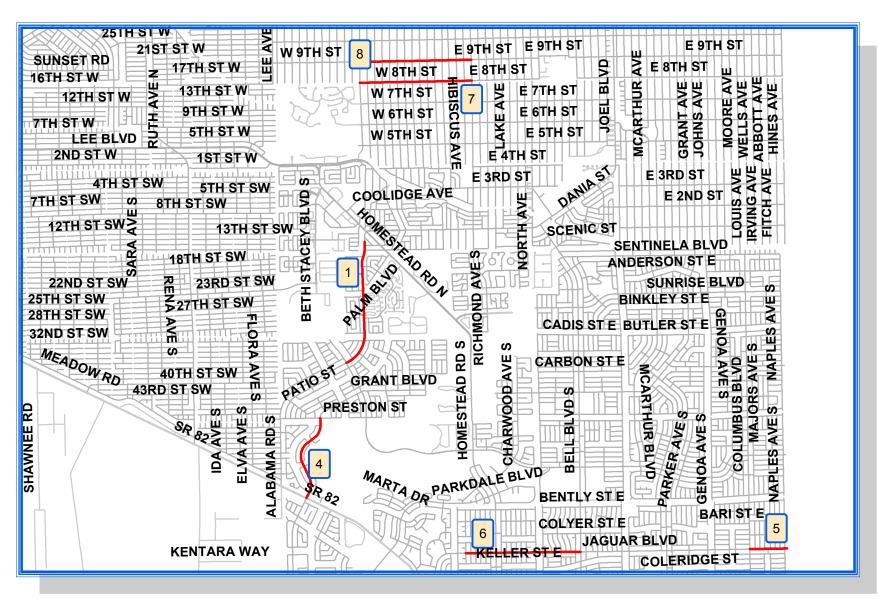

#	Street Name	From	То	Width ft	Length ft
1	ALABAMA RD S	Milwaukee Blvd	Arizona Rd	24	8160
4	GRANT BLVD	SR 82	PRESTON ST	18	5645
5	JAGUAR BLVD	COLUMBUS BLVD	END	20	2325
6	JAGUAR BLVD	FERNDALE AVE S	BELL BLVD S	18	7170
7	W 8TH ST	WILLIAMS AVE	RICHMOND AVE N	18	6995
8	W 9TH ST	WILLIAMS AVE	RICHMOND AVE N	18	6995

INDEX


1	Coversheet
2	
3-7	Lehigh Acres


Location Map

LEE COUNTY, FLORIDA

August 15, 2022 March 16, 2023 Revised



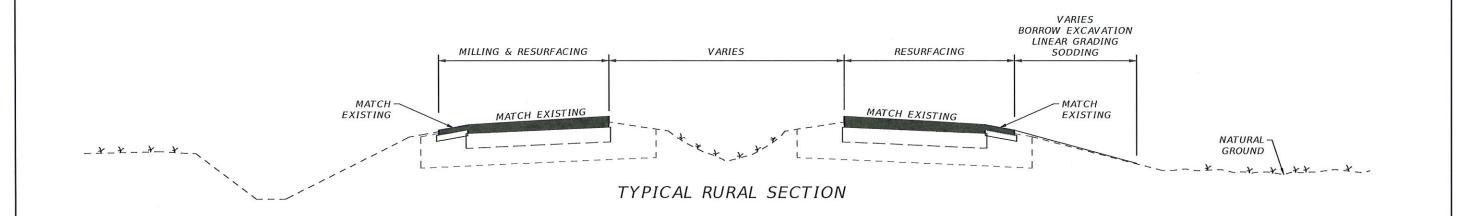

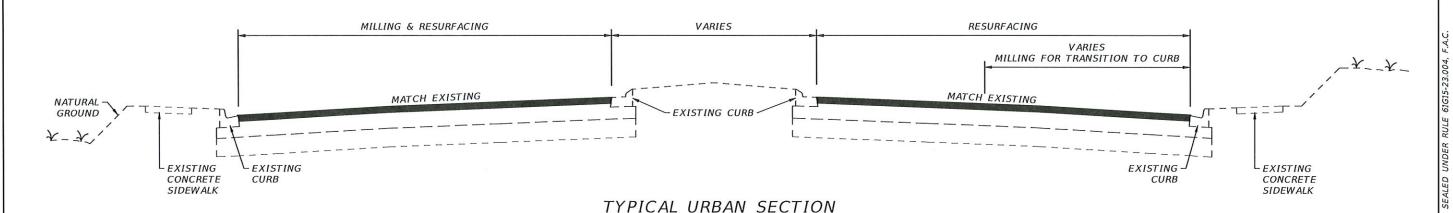

MILLING & RESURFACING NOTES

- Scheduling of all work is subject to the prior approval of the Engineer, The Contractor's attention is directed to the highly seasonal nature of traffic volumes and the Engineer's application of discretion to minimize disruption during high volume times.
- Where connecting to an existing driveway is necessary, a smooth transition to edge of pavement shall be established to the satisfaction of the Engineer. No feathered joints.
- The Contractor shall protect private property. Any damage caused by the Contractor in the performance of this work shall be corrected to the satisfaction of the Engineer and property owner at the Contractor's expense. No direct payment will be made.
- Any damage to state, county, or local roads caused by the Contractor's hauling activities shall be repaired by The Contractor to the satisfaction of the Engineer at the Contractor's expense, no direct payment will be made.
- 5. Texas swale locations and elevations will be established and laid out by the County. The Contractor is responsible for all other stakeout of the project and establishment of any necessary lines, grades, slope stakes, utility locations or any other stakeout necessary to complete the work. The cost of staking shall be subsidiary to other items of work, no direct payment will be made.
- 6. The Slate of Florida does not require a project specific National Pollutant Discharge Elimination System (NPDES) permit for construction activities that disturb less than one acre of land. However, the Contractor is responsible for Installation, maintenance, and removal of any necessary best management practices devices necessary to prevent sediment from leaving the project site. The cost of this work is subsidiary to other Items, no direct payment will be made,
- Exact limits of milling and resurfacing work within each specific segment will be established by the
 Engineer prior to commencement of work. No payment will be made for work outside the authorized
 limits of resurfacing.

- 8. Milling and/or resurfacing shall be performed such that the original cross-slopes of the roadway are maintained to the extent practical. Any deviations shall be subject to prior authorization of the Engineer.
- Shoulders shall be restored to the satisfaction of the Engineer prior to Final Acceptance of the work.
- Clean-up of the project shall be accomplished by the Contractor to the Satisfaction of the Engineer.
 Cleanup shall be subsidiary to other items of work, no direct payment will be made.
- 11. MOT to be in compliance with FDOT 102 -600 series.

		REVISIONS		
DATE	DESCRIPTION	DATE	DESCRIPTION	
		1 1		




_	LEE COUNTY				
	DEPARTMENT OF TRANSPORTATION				
	ROAD NAME	COUNTY	PROJECT ID		
	LEE				

4/8/2022 9:15:10 AM

TYPICAL SECTION

SHEET NO.

L:\Design Projects\22000\Roadway\TYPSRD01.dwg

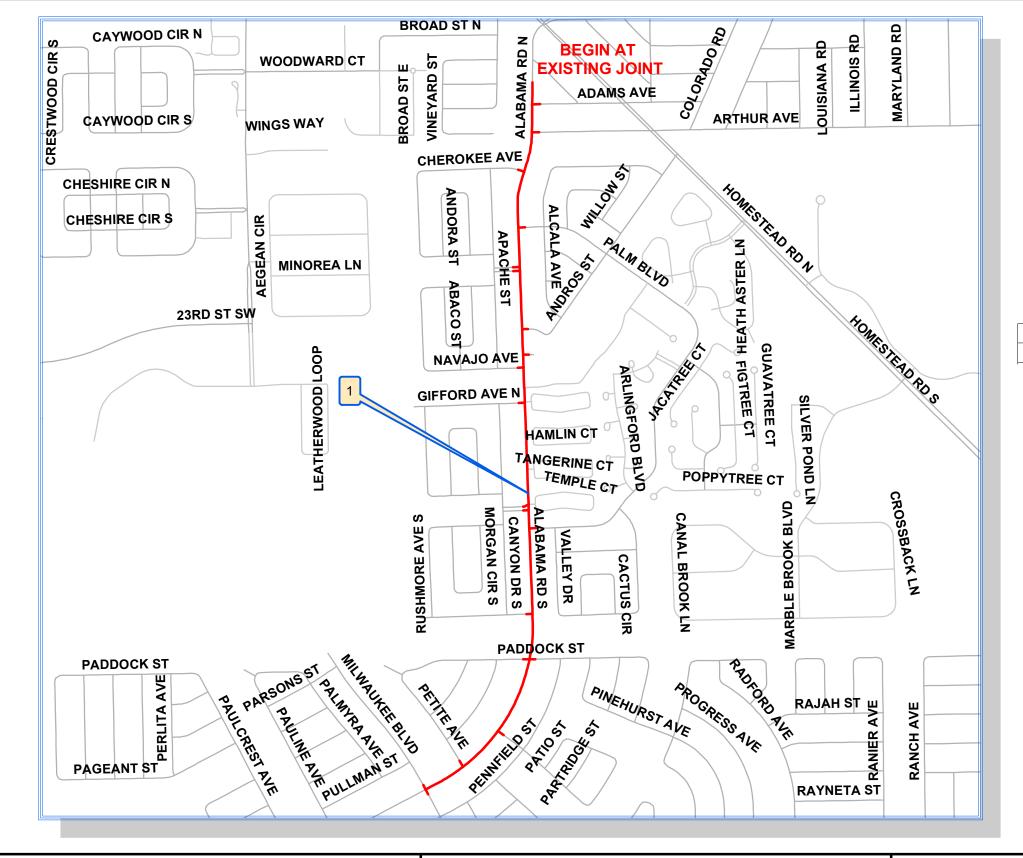


3 F Y 2 023C LEHIGH ACRES

#	Street Name	From	То	Width ft	Length ft
1	ALABAMA RD S	Milwaukee Blvd	Arizona Rd	24	8160





Lehigh Acres ArterialRoads	Dept of Transportation 1500 Monroe St Ft Myers, Florida, 33901	LEHIGH ACRES
3 F Y 2 023C	Drawn By: DRW	
Public Works Southwest	Checked By: FJL	
Florida (239)533-8900	Date: 03/16/2023 rev	Sheet 3 of 7

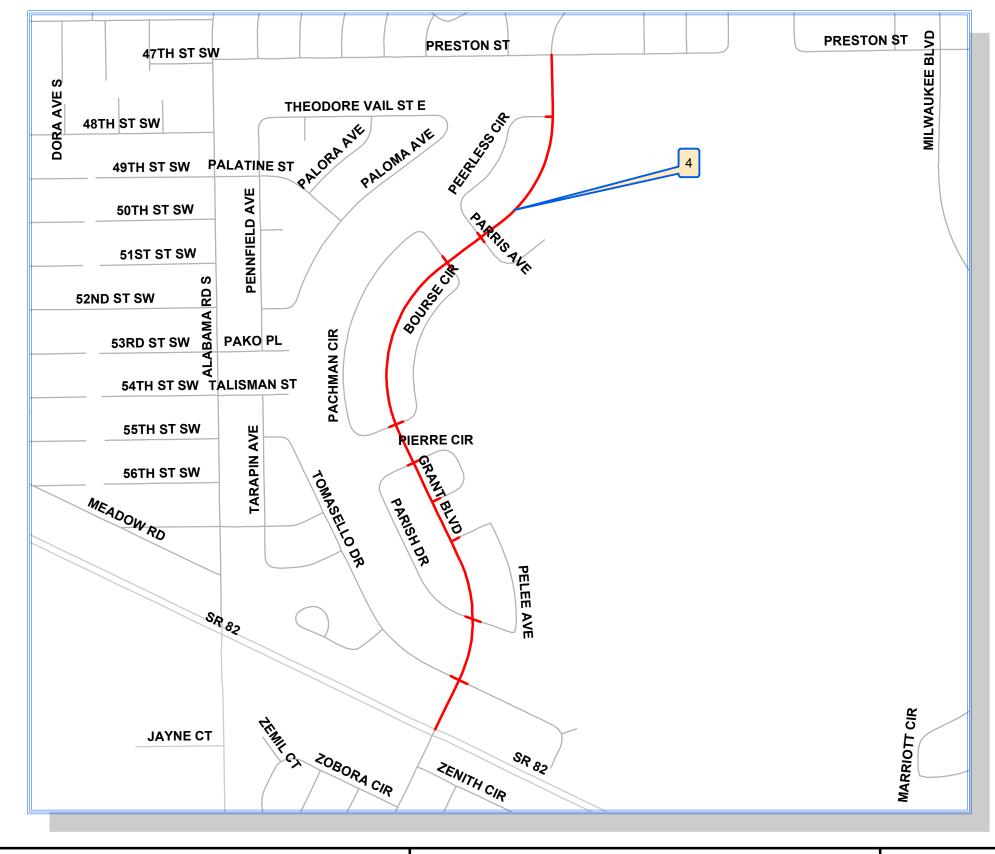

3 F Y 2 023C LEHIGH ACRES

#	Street Name	From	То	Width ft	Length ft
4	GRANT BLVD	SR 82	PRESTON ST	18	5645





Lehigh Acres ArterialRoads	Dept of Transportation 1500 Monroe St Ft Myers, Florida, 33901	LEHIGH ACRES
3 F Y 2 023C	Drawn By: DRW	
Public Works Southwest	Checked By: FJL	
Florida (239)533-8900	Date: 03/16/2023 rev	Sheet 4 of 7




3 F Y 2 023C LEHIGH ACRES

#	Street Name	From	То	Width ft	Length ft	
5	JAGUAR BLVD	COLUMBUS BLVD	END	20	2325	





Lehigh Acres ArterialRoads	Dept of Transportation 1500 Monroe St Ft Myers, Florida, 33901	LEHIGH ACRES
3 F Y 2 023C	Drawn By: DRW	
Public Works Southwest	Checked By: FJL	
Florida (239)533-8900	Date: 03/16/2023 rev	Sheet 5 of 7

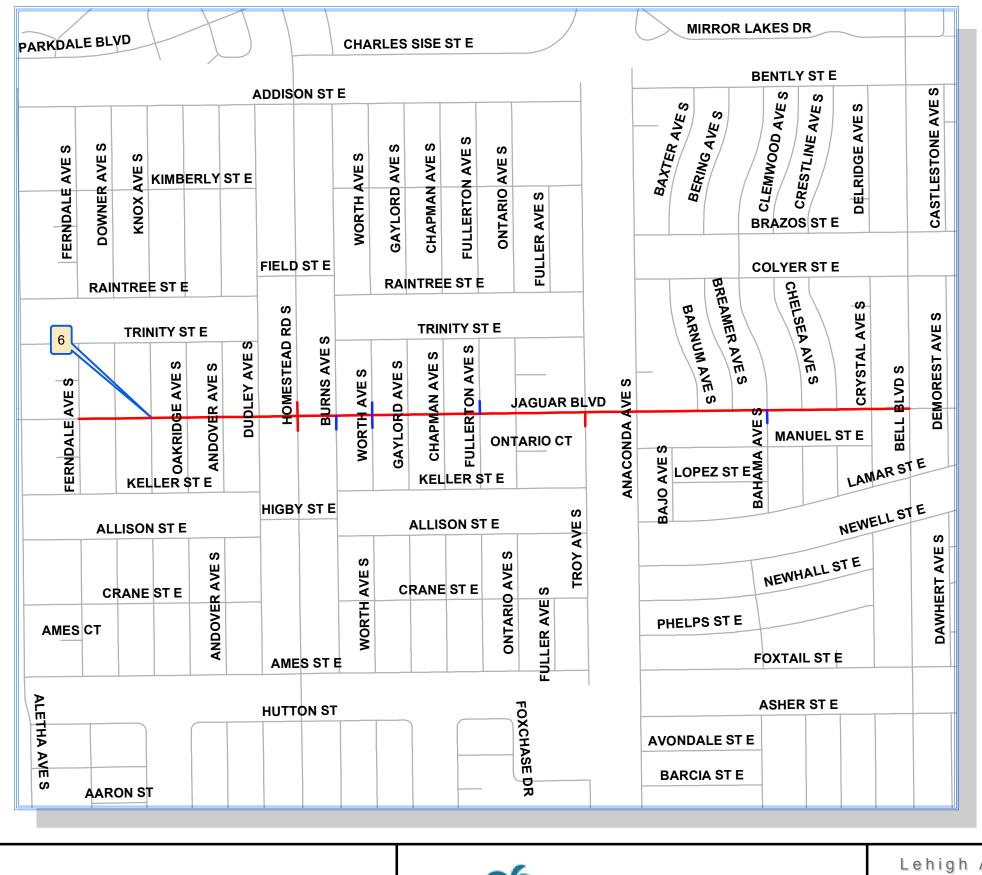

3 F Y 2 023C LEHIGH ACRES

#	Street Name	From	То	Width ft	Length ft
6	JAGUAR BLVD	FERNDALE AVE S	BELL BLVD S	18	7170

Legend

Include Leveling Course

—— Mill & Pave





Lehigh Acres ArterialRoads	Dept of Transportation 1500 Monroe St Ft Myers, Florida, 33901	LEHIGH ACRES
3 F Y 2 023C	Drawn By: DRW	
Public Works Southwest	Checked By: FJL	
Florida (239)533-8900	Date: 03/16/2023 rev	Sheet 6 of 7



3 F Y 2 023C LEHIGH ACRES

#	Street Name	From	То	Width ft	Length ft
7	W 8TH ST	WILLIAMS AVE	RICHMOND AVE N	18	6995
8	W 9TH ST	WILLIAMS AVE	RICHMOND AVE N	18	6995



Resurfacing Project
Location Map
Lehigh Acres Arterial Roads



Lehigh Acres	
ArterialRoads	
3 F Y 2 023C	

Public Works Southwest Florida (239)533-8900

Dept of Transportation 1500 Monroe St Ft Myers, Florida, 33901

St LEHIGH ACRES

Drawn By: DRW

Checked By: FJL

Date: 03/16/2023 rev

Sheet 7 of 7