


PLAN VIEW

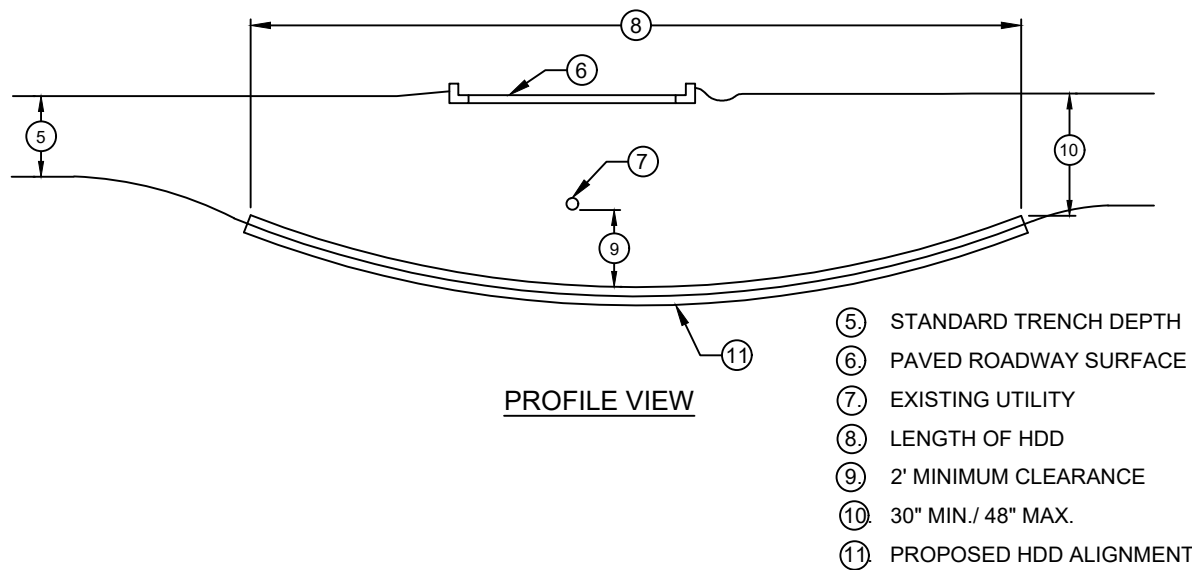


PROFILE VIEW

HDD INSTALLATION NOTES:

1. ALL WORK SHALL BE IN ACCORDANCE WITH THE LEE COUNTY UTILITIES DESIGN MANUAL.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFICATION OF AFFECTED AGENCIES AND COORDINATION WITH ALL UTILITIES PRIOR TO CONSTRUCTION.
3. ALL CONSTRUCTION MATERIALS, INCLUDING DRILLING FLUID, SHALL BE REMOVED FROM THE SITE PRIOR TO RESTORATION OF DISTURBED AREAS.
4. ALL RESTORATION WORK SHALL BE DONE IN ACCORDANCE WITH THE LCU DESIGN MANUAL.
5. CASING DIAMETER SHALL BE IN ACCORDANCE WITH THE LCU DESIGN MANUAL.
6. NO CASING SPACERS REQUIRED.
7. WHEN CASING IS REQUIRED, INSTALL 1" HDPE PIPE ATTACHED TO THE CARRIER PIPE WITH 12 GAUGE DOUBLE INSULATED COPPER WIRE INSIDE THE HDPE PIPE.

**NOT TO SCALE**

		<b>LEE COUNTY UTILITIES ENGINEERING</b> <small>1500 MONROE STREET FORT MYERS, FLORIDA 33901</small>
<b>TITLE: HORIZONTAL DIRECTIONAL DRILL UNDER ROADWAY</b>		
<b>REVISION:</b> 12/18/24	<b>DETAIL NO:</b> G-07.dwg	