RESURFACING PROJECT LOCATION MAP

Addendum 1 Roads

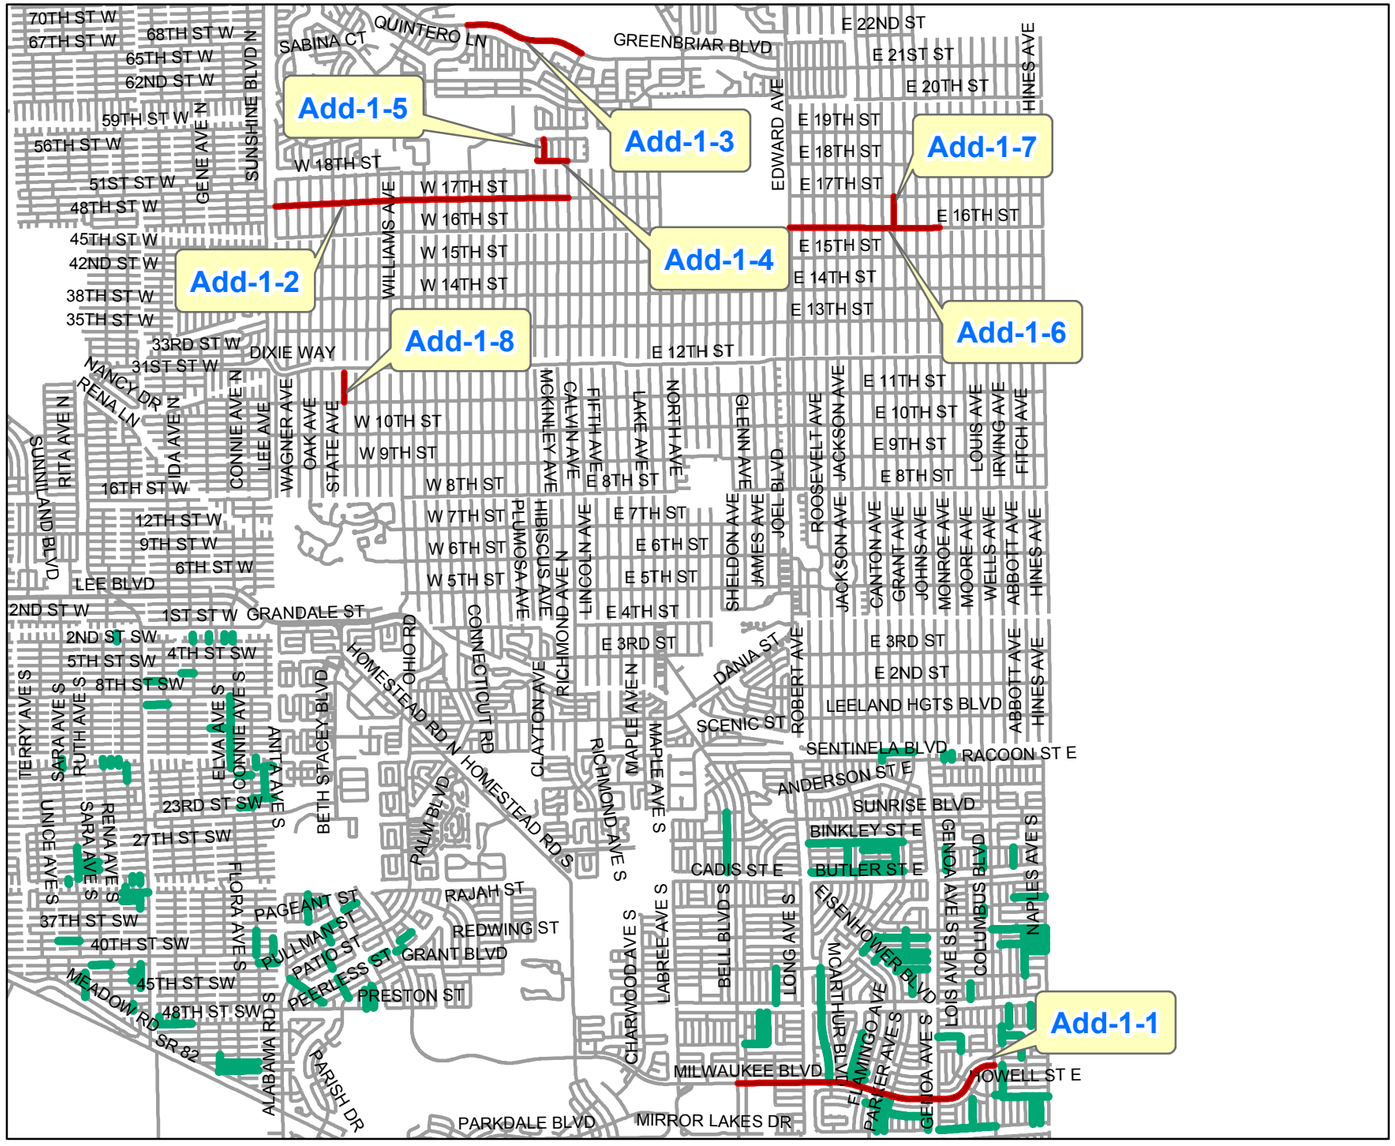

Lehigh Acres

1/FY2018a

	STREET NAME	FROM	TO	W	L	TONS
Add-1-1	**MILWAUKEE BLVD**	Bell Blvd (at joint)	Columbus Blvd	22	10500	1925
Add-1-2	**W 17TH ST**	Lee Ave	Richmond Ave N	22	12700	2328
Add-1-3	**GREENBRIAR BLVD**	Richmond Ave	Roderick Ln	20	5100	850
Add-1-4	**TREMAINE ST**	Laurie St	Richmond Ave N	18	1275	191
Add-1-5	**LODGE ST**	Tremaine St	McClure	18	1000	150
Add-1-6	**E 16TH ST**	Joel Blvd	Leroy Ave	18	6400	960
Add-1-7	**TRUMAN AVE**	E 16th St	E 17th St	18	1600	240
Add-1-8	**STATE AVE**	W 11th St	W 12th St	18	1275	191

1. ALL DRIVEWAYS MUST HAVE A SMOOTH TRANSITION TO THE EDGE OF PAVEMENT.
2. ALL SHOULDERS MUST BE RESTORED TO ORIGINAL CONDITION PRIOR TO COMPLETION AND PAYMENT.
3. ALL MILLED SURFACES MUST BE RESURFACED WITHIN 48 HOURS

Resurfacing Project Location Map
Lehigh Acres Local Roads

Lee County Southwest Florida

Countywide
Lehigh Local Rds
1-FY/2018a

Public Works
Southwest
Florida
(239) 533-8900

Dept of Transportation
1500 Monroe St
Ft Myers, Florida. 33901

Drawn By: CGP

Checked by: DAD

Date: 06/20/2017

COUNTYWIDE

Addendum 1

dated 08/29/2017